

Bid Evaluation Report		
Evaluation Report – Renovation of Dera Murad Jamali Branch		
1	Name of Procuring Agency	Sindh Bank Ltd.
2	Tender Reference No.	SNDB/COK/ADMIN/TD/1277/2022
3	Tender Description	Renovation of Dera Murad Jamali Branch
4	Method of Procurement	Single Stage One Envelope Bidding Procedure
5	Tender Published / SPPRA S.No	T00531-22-0015. Express Tribune, Daily Express, Sobh (27/10/2022)
6	Total Bid Documents Sold	02
7	Total Bids Received	02
8	Technical/Financial Bid Opening Date & Time	15/11/2022 at 1100 Hrs
9	No. of Bid Qualified	02
10	Bid(s) Rejected/Disqualified	00

Detail on the above is as follows:-

S No	Name of Firm or Bidder	Qualified / Disqualified in Technical / Eligibility Inspection	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Engineering Estimated cost (Rs.2,855,525/-)	Reasons for acceptance/ rejection	Remarks
0	1	2	3	4	5	6	7
1.	M/s. Latifi Enterprises	Qualified	Rs.2,413,325/- (Area 2,275 sq.ft x Rate per sq.ft Rs.1,060.8021)	1 <sup>st</sup> Lowest	Rs.442,200/- Below the estimated cost	Accepted Most Advantageous Bid	Accepted for Contract Award
2.	M/s. G.A Woods	Qualified	Rs.3,327,060/- (Area 2,275 sq.ft x Rate per sq.ft Rs.1,462.4439)	2 <sup>nd</sup> Lowest	Rs.471,535/- Above the estimated cost	High In Bid	

Accordingly, going by the Technical/Financial Evaluation criteria laid down in the tender document, M/s. Latifi Enterprises is the most advantageous bid i.e. Rs.2,413,3325/- and is also below the estimated cost,hence recommended for Renovation of Dera Murad Jamali Branch.

Members Signature- Procurement Committee

Arshad Abbas Soomro  
Head of Administration

Dilshad Hussain Khan  
Chief Financial Officer

Syed Muhammad Aqeel  
Chief Manager, IDBL Karachi

# MINUTES OF THE OPENING OF THE TENDER (TECHNICAL /FINANCIAL PHASE)

TYPE OF PROCUREMENT

ADMIN / IT / CONSULTANT / MEDIA

TENDER NAME

Renovation of Dera Murtaza Janali Brest

TYPE OF TENDER

SINGLE STAGE-ONE ENVELOPE / SINGLE STAGE-TWO ENVELOPE / TWO STAGE / TWO STAGE-TWO ENVELOPE

OPENING DATE

15-11-22

OPENING TIME

11:00 Hrs

ATTENDANCE (MEMBER PC)

794

134

0.11

ATTENDANCE (REPS. OF BIDDERS)

NAME

FIRM

BID OFFERED

1, GAWOODS P. 3,327,060/-  
2, Doly Enterprises P. 2,413,825/-

471

47

47

47

BIDS ACCEPTED FOR EVALUATION

#02

TOTAL BIDS REJECTED

REMARKS

SIGNATURE MEMBERS PC-ADMIN

Head - Fin Div.

Head - Admin Div.


Member-IDBL

Date:

ATTENDANCE SHEET  
 BID OPENING -

FOR SELECTION OF Renovation of Dera Mural Jamali Bunk

Date: 15-11-2022




S.No	Company Name	Name of Company Representative	Contact No.	Company Address	Signature
1	GA Woods	---	By Drop Box		
2	Latifi Enterprises	Firbat Ali	0301 2430726	C-707 Billy Tower	

Signature - Procurement Committee Members

Head of Administration

Chief Financial Officer

Chief Manager (IDBL)

# **LATIFI ENTERPRISES**

**CIVIL, INTERIOR, ELECTRICAL**

To,  
Head of administration  
SINDH BANK LIMITED  
HEAD OFFICE

**TENDER FOR RENOVATION WORKS AT SINDH BANK DERA MURAD  
JAMALI BRANCH.**

We are hereby submitting our offer in full compliance with the terms and conditions of above said project. We confirm that we have the capability to execute this project within scheduled period.

I hope we build a stronger relationship in the future.

SINCERELY,

  
LATIFI ENTERPRISES



# LATIFI ENTERPRISES

**CIVIL, INTERIOR, ELECTRICAL**SIGNATURE: Latifi Enterprises PC-ADMIN**4 FINANCIAL PROPOSAL****PRICE SCHEDULE**


(Applicable for the year 2022-23)

Name of Bidder Latifi EnterprisesHead - Fin. Div. [Signature]Head - Admin Div. [Signature]Head - Estt. Div. [Signature]Date: [Signature]**ESTIMATE FOR RENOVATION WORKS- Dera Murad Jamali Branch  
SINDH BANK LTD**

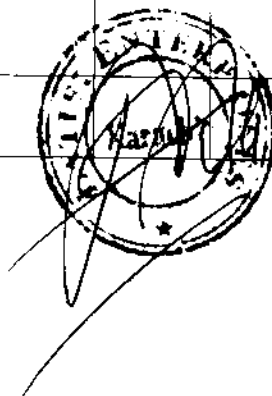
Area 2275 sft

S#	DESCRIPTION	AMOUNT
A	CIVIL WORKS	1,192,775/-
B	PLUMBING WORKS	172,400/-
C	ELECTRICAL WORKS	540,400/-
D	HVAC	182,750/-
E	Shifting & Installation of Items from Dera murad Jamali Br to New premises	325,000/-
<b>*TOTAL RENOVATION COST.....</b>		<b>2,413,325/-</b>

\*This amount will be considered as only the "Bid Offered". Whereas be apprised that the successful bidder will be the one whose "Evaluated Bid" is the lowest. (For further clarification refer Note 9. below)



S#	DESCRIPTION	UNIT	QTY.	RATE	AMOUNT
A	CIVIL WORKS				
1	<b>Dismantling / Removal Works.</b>				
	Dismantling / Removal of existing Block/Brick masonry, ceiling, R.C.C slab, projection, sub floor cutting, chipping of plaster where required, Doors & windows with frame in any shape, Iron grills, mosaic skirting, Dado & all sanitary fixtures, water & drainage line, entire electrical wirings, disposed off useless materials/debries outside the municipal limits and stack useable materials as decided by bank's engineer. complete in all respect. (Contractor must visit the site prior to quote the rate). Salvage material to be returned to landlord or Bank as the case may be.	Job			
2	<b>Termite Proofing</b>				
	Providing and carrying out termite proofing using FIPROKILL/ BIFLEX / DURSANE with a solution of 1 gallon of chemical to 50 gallons of water, sparing this solution @ 2 liters per sq. meter area (or liters per 10.76 sq. ft. Area) with a pressure ensuring at least 3" penetration in the soil of the area to be treated. The contractor will provide a guarantee for a period of ten years against infestation of termite in the shape and mode approved by the Engineer, stating that in case of infestation, additional treatment will be provided by the contractor at no extra cost to the Client (horizontal & Vertical).	SFT	2275	15/-	34,125/-
3	<b>Plain cement Concrete (Cement as per Market rate)</b>				
	Providing, laying, average 4" thick Flooring (1:3:6) at wash room, kitchen raised floor of 1250 psi compressive strength under any type of flooring using best Quality OPC/Sulphate Resistant cement and local approved quality sand and crushed stone, form work and its removal, with necessary arrangements where required excluding base of tiles complete in all respects as per approval of bank's engineer.	CFT	50	320/-	16,000/-
	Cement: Falcon, Lucky Pakland, D.G Khan Sand: Hyderabad Bolari / Malir River/Hub Crush: Hub 3/4" and Kot Banglo for Interior Sindh				
4	<b>REINFORCED CEMENT CONCRETE (Vault Room as per Layout Plan).</b>				



SIGNATURE OF THE PROJECT MANAGER

Head - The

The


The

Date

	Providing and laying, compacting finishing & curing etc. straight or curved cast- in place designed mix 1:2:4 Reinforced Cement Concrete using 1 Part of Ordinary Portland Cement or equivalent, 2 Parts of silt free local sand and 4 Parts of 3/4" thick downgraded crushed stone; mixed in a manner to achieve a cube strength of 3000 psi in 28 days, including mixing, transporting, hoisting, lifting & placing at any height / depth, vibrating and curing etc. Complete in all respect including cost of Steel Reinforcement (3/8" dia steel bars G-60 @ 6" C/C both ways, staggered double jaal in a manner that the alternate spacing b/w bars should not increase 3" C/C) & form work for Cement Concrete including cutting, bending, laying in position, making joint and fastening, removal of rust from bars, cost of binding wire and labor charges for binding of steel reinforcement; also includes cost of form work and its removal. Complete in all respects, 6" thick walls, and column or as per direction of Engineer	CFT	200	980/- 196,000/-
<b>5</b>	<b>Block / Brick Masonry works.</b>			
	Providing & laying Block / Brick masonry walls including racking of joints with 1:4 cement sand mortar, the job includes Two 3/8" dia steel bars of 2'-0" length on both sides of wall at every 3'-0' ft height for anchoring of masonry with the sides and Two 3/8" dia bars of 2'-0" length at every third block length for anchoring masonry walls to plinth/floor beams, complete in all respect as per drawing, specifications, to the satisfaction of Architect / bank's engineer.			
	4" thick Block Masonry internal walls (First class Machine made Blocks)	SFT	950	160/- 152,000/-
<b>6</b>	<b>Plaster Works.</b>			
	Providing & laying 3/4" thick cement sand plaster (Internal / External) with 1:4 cement sand mortar on walls, columns, beams, using best quality O.P.C, including 6" inches wide mesh at joints of structure with block masonry and over conducting ,smooth trowel finish complete in all respect. (This includes all the base plaster require for making diagonal and alignment for the existing walls) as per satisfaction of Architect / bank's engineer.	SFT	2500	60/- 150,000/-
<b>7</b>	<b>Flooring, Elevation &amp; Special Finishes.</b>			



	Providing and laying glazed full body Porcelain tiles 24" X 24" at floor, of approved design, colour and pattern, china bone colour or Master or equivalent full body porcelain, setting in Stile dry bond (with cement), with matching color imported Grout. Complete in all respect, including curing, cleaning, finishing & hacking/chipping of existing surface for bonding where necessary, and 4 inches wide skirting at walls of the same tiles as above mentioned, with 1:2:4 PCC 50 mm thick, etc. as per specifications and/or as directed by the Architect / Engineer (at any elevation)	SFT	0		
8	<b>FALSE CEILING</b> <b>Gypsum Board (24"X24")</b>				
	Providing & laying 8 mm thick gypsum board False Ceiling, 24" x 24" Elephant Brand or approved equivalent in straight, curved, tiles or multiple profiles, as shown on drawing section, fixed with imported powder coated, with groove, aluminum, "T" & "L" section with ceiling suspension system having provisions for light and AC grill. Complete in all respect as per drawing and instruction of Bank's Engineer.	SFT	950	130/-	123,500/-
9	<b>Ceramic Tiles</b>				
a	Toilet: Providing / Laying wash room tiles (HMD45-117 9"x17" SB for floor & walls upto 4 feet height (Master brand) or equivalent as per approved shade & layout pattern with 2" thick base concrete including grouting of joint with matching grout material of Stile, complete in all respect as per satisfaction of Architect / bank engineer.	SFT	250	320/-	80,000/-
b	Kitchen/Pantry: Providing / Laying Pantry tiles (HMD38-50SF 9" x 17" SB for floor & walls upto 5 feet height (Master brand) or equivalent as per approved shade & layout pattern with 2" thick base concrete including grouting of joint with matching grout material of Stile, complete in all respect as per satisfaction of Architect / bank engineer.	SFT	50	320/-	16,000/-
10	<b>Marble</b>				




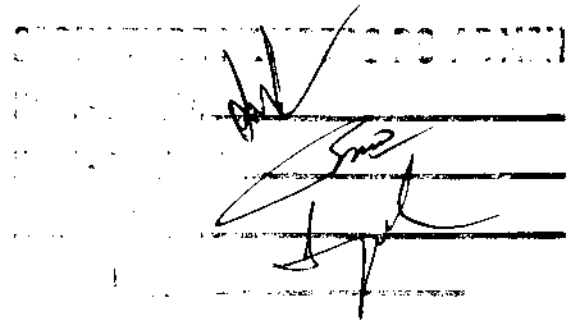


	Providing & fixing pre polished 3/4" thick Marble Top quality with approved size and shade over 2" thick pre cast RCC slab including 1/2" thick gola, grouting and jointing including cost of cutting of marble for basin and sink bowl including filling with silicone around joint of marble complete in all respect as per satisfaction by the engineer.				
	Pantry Counter Top (Boticina)	SFT	16	750/-	12,000/-
1					
1	<b>WOODEN CABINETS</b>				
	<b>Kitchen Cabinets</b>				
a	<b>Lower Unit:</b> Providing, fabricating and fixing in position pantry cabinets 24" deep 32" high consisting of 3/4" thick laminated board (Furniture color) of SONEX, Noor or equivalent on front shutter and drawers, Dark grey on internal box and shelves moulding 1/2"x3/4" including nails, screws, bolts, imported hinges, catchers, locks, handles, 3 coat of sprit polish of matching shade of furniture color on wood lipping and wood preservative treatment including premium quality ceramic tiles above 4" thick P.C.C floor platform complete in all respects as per drawings and as directed by the bank's Engineer. all kind of best quality hardware's, spring hinges, SS handles, locks etc. Complete in all respects.	SFT	18	1250/-	22,500/-
b	<b>Upper Unit:</b> Providing, fabricating and fixing in position pantry cabinets 12" deep and 24" high (Hanging) consisting of 3/4" thick laminated board (Furniture color) of SONEX, AL Noor or equivalent on front shutter and drawers, Dark grey on internal box and shelves moulding 1/2"x3/4" including nails, screws, bolts, imported hinges, catchers, locks, handles, 03 coat of sprit polish of matching shade of furniture color on wood lipping and wood preservative treatment complete in all respects as per drawings and as directed by the bank's Engineer.	SFT	20	1250/-	25,000/-
1					
2	<b>Paint at Walls</b>				
	Providing and applying, 2 coats of ICI Matt Finish Paint Ash White (3130) or BERGER or equivalent of approved colour and shade, at any floor & at any height over one coat of primer and making smooth and even surface by applying ICI Paintex base filling as per specifications, to surface of walls, complete in all respects as specified and as approved by the bank's Engineer.	SFT	2500	55/-	137,500/-
1					
3	<b>WOODEN DOOR / FRAME / CHOWKAT / Beading</b>				



a	<b>DOOR FRAME:</b> Providing and fixing of required width, 16 SWG, GI door frames for Toilets, kitchen, stores & cash counter with polishing, including Lintels, hold fasts, where ever required, complete in all respect including painting / polish with proper beach / diyar wood beading.	NO	5	7500/-	37,500/-
b	<b>SKIN DOORS,</b> 1-1/2 inches thick (for Toilets, Kitchen, stores & cash counter) Provide and install doors consisting of best quality Malaysian skin, pressed over best quality treated partial wood framing, with approved quality of door locks, handle, tower bolt, hold fast, stopper, hardware and paint /polish, complete in all respect.	SFT	105	450/-	47250/-
1	<b>4</b> <u>INSTALLATION OF VAULT/Locker ROOM DOOR</u>				
	Lifting & Fixing charges of Bank's supplied Vault / Locker Doors, welding of door frame with RCC MS bars, and to facilitate the Vendors. Complete in all respects.	NO	1	15000/-	15,000/-
1	<b>5</b> <u>Wrought Iron Grills for external windows, AC outers (If necessary)</u>				
	Approved design grills for all external windows & Ac Outers/exhaust fans (if required). The security grills will be installed from inside so that glass will be visible from outside. MS Grill comprising of 1/2" solid square bars @ 6" c/c. 1"x1-1/2" MS 16 gauge angle iron, welding, grinding, finishing, rubbing 3 coat of enamel paint (ICI,NIPPON,BERGER or equivalent) red oxide before paint. Complete in all respects, as per standardized design and /or as shown in drawing as per approved design, attached herewith. Further proper lockable grills with above specification will also be provided for all AC outdoor units.	SFT	150	590/-	88,500/-
1	<b>6</b> <u>M.S DOOR on (ATM internal, Emergency &amp; Guard Post)</u>				
	Fabricating, providing and fixing MS door with 16 S.W.G M.S 3/4" square pipe, 16 SWG MS sheet pressed over this frame including metal door frame, at both sides, sheet frame painted with approved enamel color including 2" x 5" eye level opening with proper MS shutter of 16 swg sheet to look outside, including best quality hinges, locks, handles, hold fasts and other necessary hardware etc. size as per site. Complete in all respects as per drawing attached herewith, specifications and as directed by the Bank.	SFT	42	950/-	39,900/-
<b>TOTAL CIVIL WORKS...</b>				<b>1192,775/-</b>	





**Plumbing Works**


S.No.	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
1(a)	Providing and fixing European type ceramics ware coupled water closet, ICL IFO or DURA , equivalent white / light colour, including 3 gallons cistern, P/S trap, C.P tee stop cock with wall cups, connection pipes, "SONEX", "MASTER (Royal)", hinged double bacolite seat and cover of best quality, all joints to services and drains, plugging and screwing as necessary to the structure and make good the same, complete in all respect as per specifications and drawings.	Nos	1	13500/-	13,500/-
(b)	Providing and fitting Glazed earthen ware water closet, squatter type (Orisa pattern), combined with foot rest, Best Quality including Plastic made Flushing tank, SONEX tee stop cock for cistern water inlet and C.P connector with nuts and fitting, approved other ancillary material complete in all respect.	Nos	1	10,000/-	10,000/-
2	Providing and fixing Wash hand Basin Vanity type, ICL IFO or DURA or equivalent white colour "SONEX"/ "MASTER" waste coupling, plug with C.P brass chain, 1.5" dia. P.V.C (D type) waste pipe connections to water lines, tee stop cock for cold and hot water inlet connector with nuts and fitting, waste pipe waste coupling , plugs with chain other ancillary material C.P grating including C.P bottle trap, testing etc. complete in all respect and as directed by the Engineer.	Nos.	2	9,500/-	19,000/-



3	Provide & fix best quality Stainless Steel imported Kitchen Sink, Balraco or equivalent make (40" x 20") 1000mm x 500mm sink with CI or WT brackets 150mm (6") built in wall, 40mm (1 1/2") rubber plug & chrome plated brass chain, 40mm (1 1/2") C.P. brass waste, pillar tap 2 way deluxe, 40 mm (1 1/2") dial malleable iron or C.P. brass trap, Bottle trap and unions. Make requisite holes in walls & floor for pipe connections & make good with approved material. (with SONEX fittings).	Nos.	1	8,500/-	8,500/-
4	Provide & fix uPVC floor drains of 4" dia of make Nikkasi or approved equivalent, having minimum guaranteed 2" water seal with screw down C.P. cover, peripheral drains with or without a vent arm. Make requisite holes in walls, floor for pipe connections & make good with approved material, including SS drain / grating with side perforation.	Nos.	3	2,000/-	6,000/-
5	Provide & fix approved quality chromium plated towel rails 750mm x 20mm (30"x3/4") with brackets and C.P. screws. (Taiwan make)	Nos.	2	2,000/-	4,000/-
6	Provide and fix approved quality C.P. toilet paper holders and coat hook. (Taiwan make)	Nos.	2	2,000/-	4,000/-
-	Provide & fix p soap dish of approved quality with C.P. screws. (Master /Sonex) (White color)	Nos.	2	5,000/-	10,000/-
8 (a)	Provide and fix Muslim Showers manufactured by Master/Sonex or equivalent, complete with stop cock and controlled spray head. (White color)	Nos.	2	5,500/-	11,000/-
(b)	Providing and fixing 15 mm dia C.P. mixer with C.P. pipe 15 mm dia, of Master, Sonix or approved equal complete including pipe connections, all fittings, testing etc. (White color)				
i)	For Wash basin	Nos.	2	5,000/-	10,000/-
ii)	Kitchen Sink Mixer	Nos.	1	5,500/-	5,500/-



9	Providing, fixing, jointing and testing Polypropylene Random (PPR) pipes make Dadex / AGM or approved equivalent pressure pipe for cold/hot water as per DIN 8077-8078, PN-20 for pipes and DIN 16962, PN-25 for fittings (polyfusion welded joints) inside building including fittings and specials (sockets, tees, elbows, bends, crosses, reducers, adaptor, plugs and union etc.) supported on walls or suspended from roof slab or run in chases including pipe hangers, supports, cutting and making good the chases and holes, its painting and insulation against sun light complete in all respects, conforming to BSS. Cut and make good with Test and Commission for cold and hot water system. Job also includes making Water Connection to existing Water supply system.				
i	Dia 1-1/2"	rft	-		
ii	Dia 1-1/4"	rft	-		
iii	Dia 1"	rft	80	200/-	16,000/-
iv	Dia 3/4"	rft	80	180/-	14,400/-
10	Provide and fix of Gate valve, Threaded ends, bronze body with union bonnet, non-rising stem and wedge disc. suitable for 8.5 bars SWP and 250 deg. F., manufactured by KITZ (Japan) or approved equivalent.				
i	Dia 1 1/2"	Nos.	-		
ii	Dia 1 1/4"	Nos.	-		
iii	Dia 1"	Nos.	1	2,500/-	2,500/-
iv	Dia 3/4"	Nos.	-		
v	Dia 1/2"	Nos.	-		
11	Provide and fix cast UPVC pipes( AGM/dadex /vebro turkey Brand) including fittings such as tees, elbows, sockets, wyc, hangers/supports etc. conforming to BSS for soil waste and vent pipes as embedded in floor and walls or suspended from slab or clamped to wall including plaugsm hangars, beds, Tees, Yees. Include for making requisite number of holes in walls and floors where required and making good the same as necessary to the structure labeling, testing to 6.5 feet water height complete. Job also includes making Sewer Connection to existing Sewerage disposal system.				
i	Dia 2"	rft	10	350/-	7,000/-
ii	Dia 3"				




iii	Dia 4"	rft	20	450/-	9,000/-
12	Provide and construct gully trap with 12"x12" cast iron frame and cover, including excavation, backfilling, masonry, plaster internally and externally vitreous China trap etc. complete and approved by the Engineer.	Nos.			
13	Provide and construct man holes for sewer with 24"x24" C.I frame and cover (40kg) including 8" Masonry, puddlo plaster internally and externally up to depths; shown on drawings and approved by the Engineer. PCC 1:2:4 base slab, benching with 1:3 cement sand mortar including 24" dia manhole cover, frame and rungs, complete in all respect.	Nos.			
14	Providing, installing & testing of Over Head Fiber Glass Water Tank make Dura or approved equivalent, with 300 Gallons storage capacity, including electric pump, motor and all necessary fittings etc. Complete in all respects as per instruction of Architect.	No	1	28,000	28,000/-


172,400/-

**Electrical Works**

S.No.	DESCRIPTION	UNIT	QTY	Rate	Amount
<b>A. INTERNAL WIRING</b>					
1	Supply, installation and commissioning of Light Circuit wiring, from MCB in DB to Switch Board to be wired with 3x2.5mm sq. (P+N+PE) PVC insulated 300/500 V grade wire, manufactured by M/s. AGE, Pioneer, FAST or equivalent, or as specified in Annexure A, in and including cost of 1" dia. heavy duty PVC conduit make Popular, Beta, installed on roof slab, above false ceiling, or concealed in walls, or as required as per site conditions, all PVC conduit accessories, pull boxes, steel pull wires, Complete in all respects. Each circuit shall have independent CPC. Maximum wiring of 2 light circuits can be pulled through 1" dia. PVC conduit.	Nos.	4	4350/-	17,400/-



2	<p>Providing, Installation, testing and commissioning of wiring of <b>Two light points</b> controlled by one switch and wired with 3x1.5 mm sq. PVC insulated wires 300/500 V grade, in and including cost of 3/4" dia. heavy duty PVC conduit recessed in wall, columns slabs or above light carrier all PVC conduit accessories, 3" high PVC junction boxes, pull boxes, steel pull wires, PVC flexible conduit from ceiling junction box to light fixture with brass chuck nut including cost of 3x1.5mm sq from Ceiling Junction Box to Light Fixture, M.S. sheet steel switch box 16 SWG with earth terminal and 2 coats of enameled paint, M.S. box shall be of the same size as that of 1, 2 or 3 gang flush type plate switches, including cost of gang type light switches 10 amps.</p>	 Nos. 0
3	<p>Providing, Installation, testing and commissioning of wiring of <b>Three light points</b> controlled by one switch and wired with 3x1.5 mm sq. PVC insulated wires 300/500 V grade, in and including cost of 3/4" dia. heavy duty PVC conduit recessed in wall, columns slabs or above light carrier all PVC conduit accessories, 3" high PVC junction boxes, pull boxes, steel pull wires, PVC flexible conduit from ceiling junction box to light fixture with brass chuck nut including cost of 3x1.5mm sq from Ceiling Junction Box to Light Fixture, M.S. sheet steel switch box 16 SWG with earth terminal and 2 coats of enameled paint, M.S. box shall be of the same size as that of 1, 2 or 3 gang flush type plate switches, including cost of gang type light switches 10 amps.</p>	Nos. 17 3800/- 64,600/-
4	<p>Same as Item No. A.02 mentioned above, but wiring of <b>Wall Bracket Fan points</b> including cost of M.S. sheet steel switch box 16 SWG with earth terminal 1-10 Amps gang type switch make CLIPSAL (Australia), PDL (New Zealand), ABB (Italy), MK (UK), Legrand (France).</p>	Nos. 2 2000/- 4000/-
5	<p>Confirming to same specifications as mentioned above in Item No. A.02 but wiring of <b>Exhaust Fan points</b>, including cost of hook box and cost of 10 Amp switch make Clipsal M.S. box 16 SWG with earth terminal, 2 coats of antirust point, all fixing accessories, 1-5 Amps ceiling rose and including one switch of 10 amps switch, make CLIPSAL (Australia), PDL (New Zealand), ABB (Italy), MK (UK), Legrand (France).</p>	Nos. 3 2500/- 7,500/-



6	Providing & wiring of <b>1-3 pin 15 Amps</b> power socket outlets (for General Use) wired with 2x4mm <sup>2</sup> +1x2.5mm <sup>2</sup> CU/PVC insulated cable 300/500 Volt grade, make Pakistan cables, Fast, Pioneer in 25mm dia PVC conduit make Beta, Popular, recessed in wall/floor, above false ceiling or as required as per site conditions, all PVC conduit make Beta accessories, pull boxes, steel pull wires. Complete with all conduit & wiring accessories including 15 Amps, 3 pin combined switch socket make Clipsal (Austria), Panduit, MK(UK), Legrand (France) or approved equivalent. Wiring shall be done directly from the MCB installed in the respective DB without any claim of circuit. complete with suitable size 1.5mm thick sheet steel back box recessed in wall.	Nos.	4	535/- 21,400/-
7	Providing & wiring of <b>1-3 pin 10 Amps</b> power switch socket outlets (for RAW supply / WAPDA) wired with 3x2.5mm <sup>2</sup> 1 core CU/PVC insulated cable in 25mm dia PVC conduit make Beta, Popular, recessed in wall/floor, above false ceiling or as required as per site conditions, all PVC conduit make Beta accessories, pull boxes, steel pull wires etc. Complete with all conduit & wiring accessories including 10 Amps, 3 pin combined switch socket make Clipsal (Austria), MK(UK), Legrand (France) or approved equivalent. Wiring shall be done directly from the MCB installed in the respective DB without any claim of circuit. complete with suitable size 1.5mm thick sheet steel back box recessed in wall.	Nos.	4	5700/- 22,800/-
i)	Confirming to same specification as mentioned above in item A-08, but outlet to outlet wiring. Complete in all respect.	Nos.	4	4200/- 16,800/-
8	Providing & wiring of <b>2-3 pin 13 Amps</b> power switch socket outlets (for UPS) wired with 3x2.5mm <sup>2</sup> 1 core CU/PVC insulated cable in 25mm dia PVC conduit make Beta, Popular, recessed in wall/floor, above false ceiling or as required as per site conditions, all PVC conduit make Beta accessories, pull boxes, steel pull wires. Complete with all conduit & wiring accessories including 13 Amps, 2/3 pins combined switch socket (duplex) make Clipsal (Austria), MK(UK), Legrand (France) or approved equivalent. Wiring shall be done directly from the MCB installed in the respective DB without any claim of circuit. complete with suitable size 1.5mm thick sheet steel back box recessed in wall.	Nos.	4	5600/- 22,400/-





i)	Confirming to same specification as mentioned above in item A-09, but outlet to outlet wiring. Complete in all respect.	Nos.	4	4000/- 16000/-
9	Providing installing & wiring for Split A/C's unit from distribution board to respective 1-3 pin 16 Amps switch socket, wired with 2x6mm <sup>2</sup> + 1x4mm <sup>2</sup> 1 core CU/PVC cable in 25mm dia PVC conduit make Beta, Popular, recessed in wall/floor, above false ceiling or as required as per site conditions, all PVC conduit make Beta accessories, pull boxes, steel pull wires etc. Complete with all conduit & wiring accessories including 16 Amps, 3 pin combined switch socket make Clipsal (Austria), MK(UK), Legrand (France) or approved equivalent. Wiring shall be done directly from the MCB installed in the respective DB without any claim of circuit. complete with suitable size 1.5mm thick sheet steel back box recessed in wall. Complete with all accessories including termination.	Nos.	5	9000/- 45000/-
i)	Confirming to same specifications & wiring, as mentioned above in Item No. A.10 but <b>wiring for Signboards</b> from distribution board to 1-3 pin 20 Amps MCB	No.	1	9500/- 9500/-
10	Providing, Installation, testing & commissioning of <b>light fixtures</b> & other accessories, complete with all accessories such as, Chain, Rod, Screw, foundation for garden light etc. Complete in all respect with chokes (ballast), lamp holders, starters, power factor correction capacitor, tube rods internal wiring, earthing terminal.			
	Flat Panel LED OS-DI.3-12W (round) of Osaka or equivalent 6" dia	Nos.	40	1750/- 70000/-
i)				
ii)	Mirror Light Fixture Philips GMP-118-84 or Equivalent	Nos.	0	- -
11	Supply, installation and commissioning of <b>Exhaust / Bracket Fans</b> of following sizes, plastic body, louvers, all necessary fixing accessories, make Asia, Climax, National or as manufactured by any one of the manufacturers as mentioned in Annexure-"A". Complete in all respects.			
i)	Exhaust Fan 12" dia	Nos.	3	4500/- 13500/-
ii)	Wall Bracket Fan 24" dia	Nos.	2	5500/- 11,000/-
<b>12. L.T POWER CABLES</b>				



	Providing, laying, testing and commissioning of following size single or multicore PVC/PVC cable 600/1000 volts grades, manufactured by Pakistan Cables, AGF, Pioneer, in suitable PVC conduit concealed in floor / wall as shown on drawings, and as per instruction of Consultant.			
ii)	25mm <sup>2</sup> 4core cu/pvc/pvc cable from main connection to Main DB	Mtrs.	10	300/- 3000/-
	10mm <sup>2</sup> 4core cu/pvc/pvc cable Main DB to UPS DB & looping	Mtrs.	10	200/- 2000/-
iii)				
iv)	6mm <sup>2</sup> 4core cu/pvc/pvc cable + 2x4mm <sup>2</sup> 1core cu/pvc cable	Mtrs.	0	-
<b>13. TELEPHONE SYSTEM</b>				
i	Providing & wiring of each <b>Telephone</b> socket outlet in preinstalled outlet boxes, wired with 4 Pair Cat-6 (UTP) Cable, make 3M / PANDUIT USA in 25mm dia PVC conduit recessed in slabs, floors, walls, columns or on slab above false ceiling or as required as per site conditions,, complete with all conduit & wiring accessories including RJ-45 IOs & Face Plates. Complete in all respect with suitable size 1.5mm thick sheet steel back box recessed in wall.	Nos.	7	650/- 4550/-
ii	Providing, laying testing and commissioning of 20 Pairs Telephone Cable, of Siemens, in 32mm dia pvc class-d pipe	Mtrs.	20	300/- 6000/-
<b>14. COMPUTER NET WORKING SYSTEM</b>				
	Providing, laying & testing of <b>Data Cable</b> 4 Pair Cat -6, make 3M / PANDUIT USA in 25 mm dia PVC conduit including Data Outlet (3M make) Face plate (2port) w/o shutter RJ-45 (Panduit USA) K6 Jack fixed, on 1.5 mm thick steel back box complete in all respect and as per darwing, and providing of Fluke Test Report & 3M's 20 Years Certificate (Complete as per Client's requirement )			
i		Nos.	8	650/- 5200/-
<b>15. EARTHING SYSTEM</b>				



Providing, installation, commissioning and testing of TWO earthing pits (40 to 50 ft deep or up to water level), back filling, ramming etc. complete with copper earth electrode 25mm dia and 1.5 meter long, as indicated in specification and drawings. 16 mm copper wire from electrode to ECP and to all DBs. Complete with cable clamps 38mm dia G.I. pipe till electrode from ECP, with "T", plug, for water refilling and all accessories as per drawings. Each earth pit is to be provided with a concrete manhole 300 x 300 x 450(mm) deep with 225mm thick wall including cement mortar, internal plaster 1:4, with heavy duty C.I. cover including test clamp. Complete in all respect. Earthing bores shall be made at 6 to 8 feet away from foundation and distance between earth pits shall not be less than 10 feet. Further connection of earth pit to all DBs with proper earth wire. In case where earth bore is not possible, due to hilly area, copper plate earth, having size 2'X2'X1/4", with two 10 SWG 16 mm copper wires, tight on plates with brass nut / bolt, plate buried in 6 to 8 feet deep in earth will be provided with UPVC pipe for water refilling from ground level till earth plate.

*[Handwritten signature]*  
*[Handwritten signature]*  
*[Handwritten signature]*

Nos

1

4,500/- 4,500/-

Total - Electrical works



*[Handwritten signature]*

540,400/-

**AIRCONDITIONING / HVAC WORKS :**

S#	DESCRIPTION	UNIT	QTY.	RATE	AMOUNT
1	Installation of Split Air Conditioners (SAC) including USA copper piping upto 25 feet with installation & testing complete in all respects; including control wiring from outdoor unit to indoor with 2 x 1.5 mm.sq. + 1 x 1.5 mm.sq. wire drawn in PVC 'D' class conduit clipped to wall or ceiling (wiring make Pakistan Cable, AGE or Pioneer). The return and supply copper tubing to be sized as per manufacturer's recommendation and to be drawn in separate Aeroflex insulators.				
	a) 1.0 Ton SAC	Nos	1	5,000/-	5,000/-
	b) 1.5 Ton SAC	Nos	4	5,000	20,000/-
	c) 2.0 Ton SAC	Nos			
2	Estimate additional copper piping with insulation for split units make( Muller) (charged as per final measurement on site). The return and supply copper tubing to be sized as per manufacturer's recommendation and to be drawn in separate Aeroflex insulators with gray tape.	rft	230	525/-	120,750/-
3	Provide & fix UPVC, 1-1/4" dia and 1" dia pipe, Beta or popular, for AC drain system, (medium) conforming to BSS 1307 of 1957, along with PVC fittings such as tees, elbows, unions, reducers, sockets, Teflon tape for jointing, hangers, supports, sleeves, including testing and commissioning and insulation with Aero flex insulation.	rft	180	150/-	27,000/-
4	Providing and installing M.S angle iron brackets, treated with rust proof paint and enamel coating for external A/C's units fixed to the wall slab with Hilti bolts.	Set	5	2000/-	10,000/-
<b>TOTAL HVAC WORKS.....</b>					<b>182,750/-</b>

**E. UTILIZATION OF EXISTING ITEMS (Removal & installation of items)**

S#	Items			
1	Glass Doors (Main Entrance, ATM AM Cabin) job includes new floor machines	Nos	4	15000/- 60,000/-
2	Glass Partition (Area Manager Cabin)	Sft	130	400/- 52,000/-
3	All wooden Furniture (Chairs Cleaning+tables+02 Cash Counters)	Job	1	40,000/- 40,000/-
4	All Steel Items (Vault Room Door 01, Safe+SS Card Trolley+Fire Almrah)	Complete in all respect)	1	140,000/- 140,000/-
5	Main Cable	Job	1	10,000/- 10,000/-
6	Main DB	Job	1	10,000/- 10,000/-
7	UPS DB	Job	1	8000/- 8000/-
8	IT Rack & Patch Panel	Job	1	5000/- 5000/-
				325,000/-

**Note**

- The branch has to be handed over in 75 days of issue date of award letter. In case of delay, a penalty @ 0.15% of total contract amount, for each day of delay will be imposed.
- The cost must include all applicable taxes, stamp duty (as applicable under Stamp Act 1989) duly stamped on the contract agreement, installation, labor and any other charges.
- No advance payment will be made; bills will only be processed for necessary payment on receipt of certificate of satisfaction from the Branch Manager & Project Manager.
- Calculation of bid security:** 2% of the \*Total Amount will be submitted with the tender document as bid security.
- In case it is revealed at any stage after the completion of work that the asked specification of the tender have not been met, the amount of that specific item will be fined to the contractor with appropriate action as deemed necessary by the procurement committee.
- In case of any observation arising in respect of quality of the item, the company will be liable to address it at his own cost, non-compliance of the same will result into initiation of a case against the company for non-commitment or cancellation of tender as will be decided by the Procurement Committee.
- All terms and condition of Agreement (Annexure "G") are part of Tender Document.
- In case financial bids are the same, the successful bidder will be the one who has acquired more marks in the technical evaluation.
- Lowest evaluated bid is going to be the criteria for award of contract rather than considering the lowest offered bid, encompassing the lowest whole sum cost which the procuring agency has to pay for the services/items duration the contract period. SPPRA Rule 49 may please be referred. The successful bidder will be the one whose total sum of cost is the lowest. As it is package tender, so no partial lowest cost will be considered for award of any work.
- Payment will be made as per the scheduled attached as Annexure "K".
- The successful bidder has to deposit 2% retention money at the time of award of contract and 3% will be withheld at the time of final payment. The total 5% withheld amount on account of retention money/performance security will be released after 3 months of completion of tender assigned job and after due receipt of letter of satisfaction from concerned Branch Manager (performa attached as Annexure "H").
- During final inspection, a performa (specimen attached as Annexure "H") will be filled by the representative of engineering department where he will award marks going by the quality of job executed in different categories. Any contractor awarded marks below 70 marks will be issued with warning letter and will not be eligible to take part in any future tender.
- Deviation from specs of Design Book will also be taken as penalty, where the contractor will be asked to provide the material or supplies as per the Book Specification. If the same is not followed within given time, the amount equivalent to the cost of the job will be deducted from the final payment of the contractor and the job will be performed by Bank's own resources, here contractor will also be liable of penalty of 5 marks in marking performa for each deviation committed.
- The site inspection phase will be checked as per the performa attached as Annexure I.

Signature &amp; Stamp of Bidder





**G.A WOODS**

bringing you to innovation

Construction.Civil.Interior  
Electrical.Plumbing  
HVAC.Furniture

NTN-1474022-2  
SNTN-S1474022-2  
STRN-3277876155799

To,  
Mr. Faraz Ahmed,  
Sindh Bank Ltd.  
Karachi.


**TENDER FOR RENOVATION WORKS AT DERA MURAD JAMALI BRANCH, SINDH  
BANK LTD.**

We are hereby submitting our offer in full compliance with the terms and conditions of above-said said project. We confirm that we have the capability to execute this project with in scheduled period.

I hope we build a stronger relationship in the future.

**SINCERELY,**

**G.A WOODS**

**G.A WOODS**  






# G.A WOODS

bringing you to innovation

Construction.Civil.Interior  
Electrical.Plumbing  
HVAC.Furniture

NTN-1474022-2  
SNTN-S1474022-2  
STRN-3277876155799

**ESTIMATE FOR RENOVATION WORKS FOR DERA MURAD JAMALI BRANCH  
SINDH BANK LTD**

		Area 2275 sft
Sl	DESCRIPTION	AMOUNT
A	CIVIL WORKS	1,695,050.00
B	PLUMBING WORKS	326,500.00
C	ELECTRIAL WORKS	637,000.00
D	HVAC	268,500.00
E	Shifting & Installation of Items from Dera murad Jamali Br to New premises	400,010.00
<b>TOTAL RENOVATION COST</b>		<b>3,327,060</b>

SECRETARY/ADMIN

Head - Civil

Head - Electrical

Member - Civil

Date:

**G.A WOODS**



**BILL OF QUANTITY**  
**Renoavtion Works- Dera murad jamali Branch karachi**

S#	DESCRIPTION	UNIT	QTY.	RATE	AMOUNT
<b>A</b>	<b>CIVIL WORKS</b>				
<b>1</b>	<b>Dismantling / Removal Works.</b>				
	Dismantling / Removal of existing Block/Brick masonry, ceiling, R.C.C slab, projection, sub floor cutting, chipping of plaster where required, Doors & windows with frame in any shape, Iron grills, mosaic skirting, Dado & all sanitary fixtures, water & drainage line, entire electrical wirings, disposed off useless materials/debris outside the municipal limits and stack useable materials as decided by bank's engineer. complete in all respect. (Contractor must visit the site prior to quote the rate). Salvage material to be returned to landlord or Bank as the case may be.	Job	1	80000	80,000
<b>2</b>	<b>Termite Proofing</b>				
	Providing and carrying out termite proofing using FIPROKILL/ BIFLEX / DURSANE with a solution of 1 gallon of chemical to 50 gallons of water, sparing this solution @ 2 liters per sq. meter area (or liters per 10.76 sq. ft. Area) with a pressure ensuring at least 3" penetration in the soil of the area to be treated. The contractor will provide a guarantee for a period of ten years against infestation of termite in the shape and mode approved by the Engineer, stating that in case of infestation, additional treatment will be provided by the contractor at no extra cost to the Client (horizontal & Vertical).	SFT	2275	30	68,250
<b>3</b>	<b>Plain cement Concrete (Cement as per Market rate)</b>				
	Providing, laying, average 2" thick Flooring (1:3:6) of 1250 psi compressive strength under any type of flooring using best Quality OPC/Sulphate Resistant cement and local approved quality sand and crushed stone, form work and its removal, with necessary arrangements where required excluding base of tiles complete in all respects as per approval of bank's engineer.  <u>South:</u> Cement: Falcon, Lucky Pakland, D.G Khan Sand: Hyderabad Bolari / Malir River/Hub Crush: Hub 3/4" and Kot Banglo for Interior Sindh <u>Upper Punjab</u> Fine Sand: Chenab, Coarse Sand: Lawrencepur, Crush: Margalla <u>Lower Punjab:</u> Fine Sand: Sakhi Sarwar, Coarse Sand: Crush: Sargodha	CFT	50	900	45,000
<b>4</b>	<b>REINFORCED CEMENT CONCRETE (Vault Room as per Layout Plan).</b>				
	Providing and laying, compacting finishing & curing etc. straight or curved cast-in-place designed mix 1:2:4 Reinforced Cement Concrete using 1 Part of Ordinary Portland Cement or equivalent, 2 Parts of silt free local sand and 4 Parts of 3/4" thick downgraded crushed stone; mixed in a manner to achieve a cube strength of 3000 psi in 28 days, including mixing, transporting, hoisting, lifting & placing at any height / depth, vibrating and curing etc. Complete in all respect including cost of				
<b>4</b>	<b>Steel Reinforcement (3/8" dia steel bars G-60 @ 6" C/C both ways, staggered double jaal in a manner that the alternate spacing b/w bars should not increase 3" C/C) &amp; form work for Cement Concrete including cutting, bending, laying in position, making joint and fastening, removal of rust from bars, cost of binding wire and labor charges for binding of steel reinforcement: also includes cost of form work and its removal. Complete in all respects, 9" thick walls, and column or as per direction of Engineer</b>	CFT	200	1100	220,000




S#	DESCRIPTION	UNIT	QTY.	RATE	AMOUNT
5	<b>Block / Brick Masonry works.</b>				-
	Providing & laying Block / Brick masonry walls including racking of joints with 1:4 cement sand mortar, the job includes Two 3/8" dia steel bars of 2'-0" length on both sides of wall at every 3'-0" ft height for anchoring of masonry with the sides and Two 3/8" dia bars of 2'-0" length at every third block length for anchoring masonry walls to plinth/floor beams, complete in all respect as per drawing, specifications, to the satisfaction of Architect / bank's engineer.				-
4.1	4-1/2" thick Brick Masonry	SFT	950	200	190,000
6	<b>Plaster Works.</b>				-
	Providing & laying 3/4" thick cement sand plaster (Internal / External) with 1:4 cement sand mortar on walls, columns, beams, using best quality O.P.C, including 6" inches wide mesh at joints of structure with block masonry and over conduiting ,smooth trowel finish complete in all respect. (This includes all the base plaster require for making diagonal and alignment for the exisiting walls) as per satisfaction of Architect / bank's engineer.	SFT	2500	100	250,000
7	<b>Flooring, Elevation &amp; Special Finishes.</b>				-
a	Providing and laying glazed full body Porcelain tiles 24" X 24" at floor, of approved design, colour and pattern, china bone colour or Master or equivalent full body porcelain , setting in Stile dry bond (with cement), with matching color imported Grout. Complete in all respect, including curing, cleaning, finishing & hacking/chipping of existing surface for bonding where necessary, and 4 inches wide skirting at walls of the same tiles as above mentioned, with 1:2:4 PCC 50 mm thick, etc. as per specifications and/or as directed by the Architect / Engineer (at any elevation)	SFT	0	0	-
8	<b>FALSE CELING</b>				-
	<b>Gypsum Board (24"X24")</b>				-
	Providing & laying 8 mm thick gypsum board False Ceiling, 24" x 24" Elephant Brand or approved equivalent in straight, curved, tiles or multiple profiles, as shown on drawing section, fixed with imported powder coated , with groove, aluminum, " T" & "L" section with ceiling suspension system having provisions for light and AC grill. Complete in all respect as per drawing and instruction of Bank's Engineer.	SFT	950	200	190,000
9	<b>Ceramic Tiles</b>				-
a	Toilet: Providing / Laying wash room tiles (HMD45-117 9"x17" SB for floor & walls upto 7 feet height (Master brand) or equivalent as per approved shade & layout pattern with 2" thick base concrete including grouting of joint with matching grout material of Stile, complete in all respect as per satisfaction of Architect / bank engineer.	SFT	250	400	100,000
b	Kitchen/Pantry: Providing / Laying Pantry tiles (HMD38-50SF 9" x 17" SB for floor & walls upto 5 feet height (Master brand) or equivalent as per approved shade & layout pattern with 2" thick base concrete including grouting of joint with matching grout material of Stile, complete in all respect as per satisfaction of Architect / bank engineer.	SFT	50	400	20,000

S#	DESCRIPTION	UNIT	QTY.	RATE	AMOUNT
10	<b>Marble</b>				-
	Providing & fixing pre polished 3/4" thick Marble Top quality with approved size and shade over 2" thick pre cast RCC slab including 1/2" thick gola, grouting and jointing including cost of cutting of marble for basin and sink bowl including filling with silicone around joint of marble complete in all respect as per satisfaction by the engineer.				-
	Pantry Counter Top (Boticina)	SFT	16	1000	16,000
11	<b>WOODEN CABINETS</b>				-
	<b>Kitchen Cabinets</b>				-
	<b>Lower Unit:</b> Providing, fabricating and fixing in position pantry cabinets 24" deep 32" high consisting of 3/4" thick laminated board (Furniture color) of SONEX, Noor or equivalent on front shutter and drawers, Dark grey on internal box and shelves moulding 1/2"x3/4" including nails, screws, bolts, imported hinges, catchers, locks, handles, 3 coat of sprit polish of matching shade of furniture color on wood lipping and wood preservative treatment including premium quality ceramic tiles above 4" thick P.C.C floor platform complete in all respects as per drawings and as directed by the bank's Engineer.	SFT	18	1200	21,600
a	all kind of best quality hardware's, spring hinges, SS handles, locks etc. Complete in all respects.				
	<b>Upper Unit:</b> Providing, fabricating and fixing in position pantry cabinets 12" deep and 24" high (Hanging) consisting of 3/4" thick laminated board (Furniture color) of SONEX, AL Noor or equivalent on front shutter and drawers, Dark grey on internal box and shelves moulding 1/2"x3/4" including nails, screws, bolts, imported hinges, catchers, locks, handles, 03 coat of sprit polish of matching shade of furniture color on wood lipping and wood preservative treatment complete in all respects as per drawings and as directed by the bank's Engineer.	SFT	20	1200	24,000
b					
12	<b>Paint at Walls</b>				-
	Providing and applying, 3 coats of ICI Matt Finish Paint Ash White (3130) or BERGER or equivalent of approved colour and shade, at any floor & at any height over one coat of primer and making smooth and even surface by applying ICI Paintex base filling as per specifications, to surface of walls, complete in all respects as specified and as approved by the bank's Engineer.	SFT	2500	70	175,000
13	<b>WOODEN DOOR / FRAME / CHOWKAT / Beading</b>				-
	<b>DOOR FRAME:</b> Providing and fixing of required width, 16 SWG, GI door frames for Toilets, kitchen, stores & cash counter with polishing, including Lintels, hold fasts, where ever required, complete in all respect including painting / polish with proper beach / diyar wood beading.	NO	5	10000	50,000
a					
	<b>SKIN DOORS,</b> 1-1/2 inches thick (for Toilets, Kitchen, stores & cash counter) Provide and install doors consisting of best quality Malaysian skin, pressed over best quality treated partial wood framing, with approved quality of door locks, handle, tower bolt, hold fast, stopper, hardware and paint /polish, complete in all respect.	SFT	105	800	84,000
b					

S#	DESCRIPTION	UNIT	QTY.	RATE	AMOUNT
14	<b>INSTALLATION OF VAULT ROOM DOOR</b>				-
	Lifting & Fixing charges of Bank's supplied Vault / Locker Doors, welding of door frame with RCC MS bars, and to facilitate the Vendors. Complete in all respects.	NO	1	10000	10,000
15	<b>Wrought Iron Grills for external windows, AC outers (If necessary)</b>				-
	Approved design grills for all external windows & Ac Outers/exhaust fans (if required). The security grills will be installed from inside so that glass will be visible from outside. MS Grill comprising of 1/2" solid square bars @ 6" c/c 1"x1-1/2" MS 16 gauge angle iron, welding, grinding, finishing, rubbing 3 coat of enamel paint (ICI,NIPPON,BERGER or equivalent) red oxide before paint. Complete in all respects, as per standardized design and /or as shown in drawing as per approved design, attached herewith. Further proper lockable grills with above specification will also be provided for all AC outdoor units.	SFT	150	700	105,000
21	<b>SECURITY ROLLING SHUTTER</b>				-
		SFT			-
16	<b>M.S DOOR on Emergency exit, ATM internal &amp; Guard Post</b>				-
	Fabricating, providing and fixing MS door with 16 S.W.G M.S 3/4" square pipe, 16 SWG MS sheet pressed over this frame, at both sides, sheet frame painted with approved enamel color including 2" x 5" eye level opening with proper MS shutter of 16 swg sheet to look outside , including best quality hinges, locks, handles, hold fasts and other necessary hardware etc. size as per site. Complete in all respects as per drawing attached herewith, specifications and as directed by the Bank.	SFT	42	1100	46,200
					-
	<b>TOTAL CIVIL WORKS.....</b>				<b>1,695,050</b>

**G.A WOODS**

  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

S.No.	DESCRIPTION	UNIT	QTY	Ineer Estimate	
6	Provide and fix approved quality C.P toilet paper holders and coat hook. (Taiwan make)	Nos.	2	3000	6,000
7	Provide & fix chromium plated soap dish of approved quality with C.P screws. (Master /Sonex)	Nos.	2	3000	6,000
8 (a)	Provide and fix Muslim Showers manufactured by Master/Sonex or equivalent, complete with stop cock and controlled spray head.	Nos.	2	10000	20,000
(b)	Providing and fixing 15 mm dia C.P. mixer with C.P pipe 15 mm dia, of Master, Sonix or approved equal complete including pipe connections, all fittings, testing etc.				
i)	For Wash basin	Nos.	2	9000	18,000
ii)	Kitchen Sink Mixer	Nos.	1	9000	9,000
9	Providing, fixing, jointing and testing Polypropylene Random (PPR) pipes make Dadex / AGM or approved equivalent pressure pipe for cold/hot water as per DIN 8077-8078, PN-20 for pipes and DIN 16962, PN-25 for fittings (polyfusion welded joints) inside building including fittings and specials (sockets, tees, elbows, bends, crosses, reducers, adaptor, plugs and union etc.) supported on walls or suspended from roof slab or run in chases including pipe hangers, supports, cutting and making good, the chases and holes, its painting and insulation against sun light complete in all respects, conforming to BSS. Cut and make good with Test and Commission for cold and hot water system. Job also includes making Water Connection to existing Water supply system.				
i	Dia 1-1/2"	rft			
ii	Dia 1-1/4"	rft			
iii	Dia 1"	rft	80	400	32,000
iv	Dia 3/4"	rft	80	400	32,000
10	Provide and fix of Gate valve, Threaded ends, bronze body with union bonnet, non-rising stem and wedge disc. suitable for 8.5 bars SWP and 250 deg. F., manufactured by KITZ (Japan) or approved equivalent.				
i	Dia 1 1/2"	Nos.			
ii	Dia 1 1/4"	Nos.			
iii	Dia 1"	Nos.	1	6000	6,000

**BILL OF QUANTITY**  
**Renoavtion Works- Dera Murad Jamali Branch Karachi**

**Plumbing Works**

S.No.	DESCRIPTION	UNIT	QTY	Ineer Estimate	
				RATE	AMOUNT
1(a)	Providing and fixing European type ceramics ware coupled water closet, (PORTA) or equivalent, white / light colour, including 3 gallons cistern, P/S trap, C.P tee stop cock with wall cups, connection pipes, "SONEX", "MASTER (Royal)", hinged double bacolite seat and cover of best quality, all joints to services and drains, plugging and screwing as necessary to the structure and make good the same, complete in all respect as per specifications and drawings.	Nos	1	40,000	40,000
(b)	Providing and fitting Glazed earthen ware water closet, squatter type (Orisa pattern), combined with foot rest, Best Quality including Plastic made Flushing tank, SONEX tee stop cock for cistern water inlet and C.P connector with nuts and fitting, approved other ancillary material complete in all respect.	Nos	1	25,000	25,000
2	Providing and fixing Wash hand Basin Vanity type, PORTA or equivalent white colour "SONEX"/ "MASTER" waste coupling, plug with C.P brass chain, 1.5" dia. P.V.C (D type) waste pipe connections to water lines, tee stop cock for cold and hot water inlet connector with nuts and fitting, waste pipe waste coupling, plugs with chain other ancillary material C.P grating including C.P bottle trap, testing etc. complete in all respect and as directed by the Engineer.	Nos.	2	25,000	50,000
3	Provide & fix best quality Stainless Steel imported Kitchen Sink, Balcco or equivalent make (40" x 20") 1000mm x 500mm sink with CI or WI brackets 150mm (6") built in wall, 40mm (1 1/2") rubber plug & chrome plated brass chain, 40mm (1 1/2") C.P. brass waste, pillar tap 2 way deluxe, 40 mm (1 1/2") dial malleable iron or C.P. brass trap, Bottle trap and unions. Make requisite holes in walls & floor for pipe connections & make good with approved material. (with SONEX fittings).	Nos.	1	8,000	8,000
4	Provide & fix uPVC floor drains of 4" dia of make Nikkassi or approved equivalent, having minimum guaranteed 2" water seal with screw down C.P cover, peripheral drains with or without a vent arm. Make requisite holes in walls, floor for pipe connections & make good with approved material, including SS drain / grating with side perforation.	Nos.	3	1,500	4,500
5	Provide & fix approved quality chromium plated towel rails 750mm x 20mm (30"x3/4") with brackets and C.P screws. (Taiwan make)	Nos.	2	3000	6,000

S.No.	DESCRIPTION	UNIT	QTY	lineer Estimate
i	Dia 2"	rft	-	-
ii	Dia 3"	rft	20	650, 13,000
iii	Dia 4"	rft	20	700, 14,000
iv	Dia 6"	rft	-	-
12	Provide and construct gully trap with 12"x12" cast iron frame and cover, including excavation, backfilling, masonry, plaster internally and externally vitreous China trap etc. complete and approved by the Engineer.	Nos.	-	-
13	Provide and construct man holes for sewer with 24"x24" C.I frame and cover (40kg) including 8" Masonry, puddlo plaster internally and externally up to depths; shown on drawings and approved by the Engineer. PCC 1:2:4 base slab, benching with 1:3 cement sand mortar including 24" dia manhole cover, frame and rungs, complete in all respect.	Nos.	-	-
14	Providing, installing & testing of Over Head Fiber Glass Water Tank make Dura or approved equivalent, with 300 Gallons storage capacity, including electric pump, motor and all necessary fittings etc. Complete in all respects as per instruction of Architect.	Nos.	1	37,000 37,000
15	Supply, installation & testing of mono block Goldmetic Pump G-3 or approved equivalent, with 2 HP motor 200-220 volts max. suction 27meter or max. head 35m and discharge.	Nos.	-	-
16	Mirror	Nos	-	-
Total amount for plumbing work				326,500

**G.A WOODS**

[Signature]  
 [Signature]  
 [Signature]  
 [Signature]

**Electrical Works**

S.No.	DESCRIPTION	UNIT	QTY	Rate	Amount
<b>A. INTERNAL WIRING</b>					
1	Supply, installation and commissioning of Light Circuit wiring, from MCB in DB to Switch Board to be wired with 3x2.5mm sq. (P+N+PE) PVC insulated 300/500 V grade wire, manufactured by M/s. AGE, Pioneer, FAST or equivalent, or as specified in Annexure A, in and including cost of 1" dia. heavy duty PVC conduit make Popular, Beta, installed on roof slab, above false ceiling, or concealed in walls, or as required as per site conditions, all PVC conduit accessories, pull boxes, steel pull wires, Complete in all respects. Each circuit shall have independent CPC. Maximum wiring of 2 light circuits can be pulled through 1" dia. PVC conduit.				
		Nos.	4	7000	28,000
2	Providing, Installation, testing and commissioning of wiring of <b>One light point</b> controlled by one switch and wired with 3x1.5 mm sq. PVC insulated wires 300/500 V grade, in and including cost of 3/4" dia. heavy duty PVC conduit recessed in wall, columns slabs or above light carrier all PVC conduit accessories, 3" high PVC junction boxes, pull boxes, steel pull wires, PVC flexible conduit from ceiling junction box to light fixture with brass chuck nut including cost of 3x1.5mm sq from Ceiling Junction Box to Light Fixture, M.S. sheet steel switch box 16 SWG with earth terminal and 2 coats of enameled paint, M.S. box shall be of the same size as that of 1, 2 or 3 gang flush type plate switches, including cost of gang type light switches 10 amps.				
		Nos.	0		
3	Providing, Installation, testing and commissioning of wiring of <b>Two light points</b> controlled by one switch and wired with 3x1.5 mm sq. PVC insulated wires 300/500 V grade, in and including cost of 3/4" dia. heavy duty PVC conduit recessed in wall, columns slabs or above light carrier all PVC conduit accessories, 3" high PVC junction boxes, pull boxes, steel pull wires, PVC flexible conduit from ceiling junction box to light fixture with brass chuck nut including cost of 3x1.5mm sq from Ceiling Junction Box to Light Fixture, M.S. sheet steel switch box 16 SWG with earth terminal and 2 coats of enameled paint, M.S. box shall be of the same size as that of 1, 2 or 3 gang flush type plate switches, including cost of gang type light switches 10 amps.				
		Nos.	0		
4	Providing, Installation, testing and commissioning of wiring of <b>Three light points</b> controlled by one switch and wired with 3x1.5 mm sq. PVC insulated wires 300/500 V grade, in and including cost of 3/4" dia. heavy duty PVC conduit recessed in wall, columns slabs or above light carrier all PVC conduit accessories, 3" high PVC junction boxes, pull boxes, steel pull wires, PVC flexible conduit from ceiling junction box to light fixture with brass chuck nut including cost of 3x1.5mm sq from Ceiling Junction Box to Light Fixture, M.S. sheet steel switch box 16 SWG with earth terminal and 2 coats of enameled paint, M.S. box shall be of the same size as that of 1, 2 or 3 gang flush type plate switches, including cost of gang type light switches 10 amps.				
		Nos.	17	4500	76,500

S.No.	DESCRIPTION	UNIT	QTY	Rate	Amount
5	Same as Item No. A.02 mentioned above, but wiring of <b>Wall Bracket Fan points</b> including cost of M.S sheet steel switch box 16 SWG with earth terminal 1-10 Amps gang type switch make CLIPSAL (Australia), PDL (New Zealand), ABB (Italy), MK (UK), Legrand (France).	Nos.	2	3000	6,000
6	Confirming to same specifications as mentioned above in Item No. A.02 but wiring of <b>Exhaust Fan points</b> , including cost of hook box and cost of 10 Amp switch make Clipsal M.S box 16 SWG with earth terminal, 2 coats of antirust point, all fixing accessories, 1-5 Amps ceiling rose and including one switch of 10 amps switch, make CLIPSAL (Australia), PDL (New Zealand), ABB (Italy), MK (UK), Legrand (France)..	No.	3	2500	7,500
7	Providing & wiring of <b>1-3 pin 15 Amps</b> power socket outlets (for General Use) wired with 2x4mm <sup>2</sup> +1x2.5mm <sup>2</sup> CU/PVC insulated cable 300/500 Volt grade, make Pakistan cables, Fast, Pioneer in 25mm dia PVC conduit make Beta, Popular, recessed in wall/floor, above false ceiling or as required as per site conditions, all PVC conduit make Beta accessories, pull boxes, steel pull wires. Complete with all conduit & wiring accessories including 15 Amps, 3 pin combined switch socket make Clipsal (Austria), Panduit, MK(UK), Legrand (France) or approved equivalent. Wiring shall be done directly from the MCB installed in the respective DB without any claim of circuit. complete with suitable size 1.5mm thick sheet steel back box recessed in wall.	Nos.	4	4000	16,000
8	Providing & wiring of <b>1-3 pin 10 Amps</b> power switch socket outlets (for RAW supply / WAPDA) wired with 3x2.5mm <sup>2</sup> 1 core CU/PVC insulated cable in 25mm dia PVC conduit make Beta, Popular, recessed in wall/floor, above false ceiling or as required as per site conditions, all PVC conduit make Beta accessories, pull boxes, steel pull wires etc. Complete will all conduit & wiring accessories including 10 Amps, 3 pin combined switch socket make Clipsal (Austria), MK(UK), Legrand (France) or approved equivalent. Wiring shall be done directly from the MCB installed in the respective DB without any claim of circuit. complete with suitable size 1.5mm thick sheet steel back box recessed in wall.	Nos.	4	5000	20,000
i)	Confirming to same specification as mentioned above in item A-08, but outlet to outlet wiring. Complete in all respect.	Nos.	4	3500	14,000
9	Providing & wiring of <b>2-3 pin 13 Amps</b> power switch socket outlets (for UPS) wired with 3x2.5mm <sup>2</sup> 1 core CU/PVC insulated cable in 25mm dia PVC conduit make Beta, Popular, recessed in wall/floor, above false ceiling or as required as per site conditions, all PVC conduit make Beta accessories, pull boxes, steel pull wires. Complete will all conduit & wiring accessories including 13 Amps, 2/3 pins combined switch socket (duplex) make Clipsal (Austria), MK(UK), Legrand (France) or approved equivalent. Wiring shall be done directly from the MCB installed in the respective DB without any claim of circuit. complete with suitable size 1.5mm thick sheet steel back box recessed in wall.	Nos.	4	6000	24,000
i)	Confirming to same specification as mentioned above in item A-09, but outlet to outlet wiring. Complete in all respect.	Nos.	4	4000	16,000

S.No.	DESCRIPTION	UNIT	QTY	Rate	Amount
10	Providing installing & wiring for Split A/C's unit from distribution board to respective 1-3 pin 16 Amps switch socket, wired with 2x6mm <sup>2</sup> + 1x4mm <sup>2</sup> 1 core CU/PVC cable in 25mm dia PVC conduit make Beta, Popular, recessed in wall/floor, above false ceiling or as required as per site conditions, all PVC conduit make Beta accessories, pull boxes, steel pull wires etc. Complete with all conduit & wiring accessories including 16 Amps, 3 pin combined switch socket make Clipsal (Austria), MK(UK), Legrand (France) or approved equivalent. Wiring shall be done directly from the MCB installed in the respective DB without any claim of circuit. complete with suitable size 1.5mm thick sheet steel back box recessed in wall. Ccomplete with all accessories including termination.	Nos.	5	11000	55,000
i)	Confirming to same specifications & wiring, as mentioned above in Item No. A.10 but wiring for Signboards from distribution board to 1-3 pin 20 Amps MCB	No.	1	11000	11,000
12	Providing, Installation, testing & commissioning of light fixtures & other accessories, complete with all accessories such as, Chain, Rod, Screw, foundation for garden light etc. Complete in all respect with chokes (ballast), lamp holders, starters, power factor correction capacitor, tube rods internal wiring, earthing terminal.				
i)	Flat Panel LED OS-DI.3-12W (round) of Osaka or equivalent 6" dia	Nos.	40	2200	88,000
ii)	Mirror Light Fixture Philips GMP-118-84 or Equivalent	Nos.	0		
13	Supply, installation and commissioning of Exhaust / Bracket Fans of following sizes, plastic body, louvers, all necessary fixing accessories, make Asia, Climax, National or as manufactured by any one of the manufacturers as mentioned in Annexure-"A". Complete in all respects.				
i)	Exhaust Fan 12" dia	Nos.	3	7000	21,000
ii)	Wall Bracket Fan 24" dia	Nos.	2	8000	16,000
<b>14. L.T POWER CABLES</b>					
	Providing, laying, testing and commissioning of following size single or multicore PVC/PVC cable 600/1000 volts grades, manufactured by Pakistan Cables, AGE, Pioneer, in suitable PVC conduit concealed in floor / wall as shown on drawings, and as per instruction of Consultant.				
ii)	25mm <sup>2</sup> 4core cu/pvc/pvc cable from main connection to Main DB	Mtrs.	10	5000	50,000
	10mm 2core cu/pvc/pvc cable for generator	Mtrs.	10	2000	20,000
iii)					
iv)	16mm <sup>2</sup> 4core cu/pvc/pvc cable + 2x4mm <sup>2</sup> 1core cu/pvc cable	Mtrs.	0		
<b>15. TELEPHONE SYSTEM</b>					
i)	Providing & wiring of each Telephone socket outlet in preinstalled outlet boxes, wired with 4 Pair Cat 6 (UTP) Cable, make 3M / PANDUIT USA in 25mm dia PVC conduit recessed in slabs, floors, walls, columns or on slab above false ceiling or as required as per site conditions,, complete with all conduit & wiring accessories including RJ-45 IOs & Face Plates. Complete in all respect with suitable size 1.5mm thick sheet steel back box recessed in wall.	Nos.	7	7000	49,000



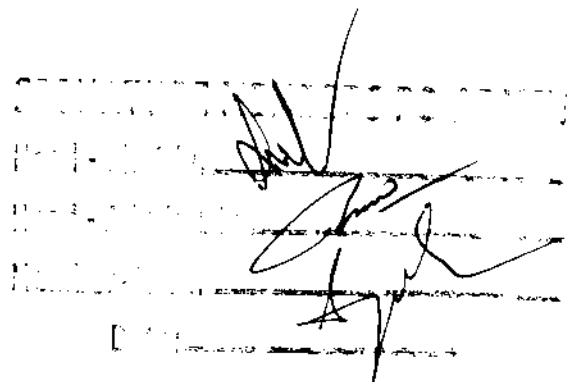
S.No.	DESCRIPTION	UNIT	QTY	Rate	Amount
ii	Providing, laying testing and commissioning of 20 Pairs Telephone Cable, of Siemens, in 32mm dia pvc class-d pipe	Mtrs.	20	700.00	14,000
<b>16. COMPUTER NET WORKING SYSTEM</b>					
	Providing, laying & testing of Data Cable 4 Pair Cat -6, make 3M / PANDUIT USA in 25 mm dia PVC conduit including Data Outlet (3M make) Face plate (2port) w/o shutter RJ-45 (Panduit USA)K6 Jack fixed, on 1.5 mm thick steel back box complete in all respect and as per darwing. and providing of Fluke Test Report & 3M's 20 Years Certificate (Complete as per Client's requirement )				
i		Nos.	8	7500	60,000
<b>16. EARTHING SYSTEM</b>					
	Providing, installation, commissioning and testing of TWO earthing pits (40 to 50 ft deep or up to water level ), back filling, ramming etc. complete with copper earth electrode 25mm dia and 1.5 meter long, as indicated in specification and drawings. 16 mm copper wire from electrode to ECP and to all DBs. Complete with cable clamps 38mm dia G.I. pipe till electrod from ECP, with "T", plug, for water refilling and all accessories as per drawings. Each earth pit is to be provided with a concrete manhole 300 x 300 x 450(mm) deep with 225mm thick wall including cement mortar, internal plaster 1:4, with heavy duty C.I. cover including test clamp. Complete in all respect. Earthing bores shall be made at 6 to 8 feet away from foundation and distance between earth pits shall not be less than 10 feet. Further connection of earth pit to all DBs with proper earth wire. In case where earth bore is not possible, due to hilly area, copper plate earth , having size 2'X2'X1/4", with two 10 SWG 16 mm copper wires, tight on plates with brass nut / bolt, plate buried in 6 to 8 feet deep in earth will be provided with UPVC pipe for water refilling fro ground level till earth plate.				
		Nos	1	45000	45,000
<b>Total - Electrical works</b>					<b>637,000</b>

**G.A WOODS**

\_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

**AIRCONDITIONING / HVAC WORKS :**

S#	DESCRIPTION	UNIT	QTY.	RATE	AMOUNT
1	Installation of Split Air Conditioners (SAC) including USA				
	a) 1.0 Ton SAC	Nos	1	8,000	8,000
	b) 1.5 Ton SAC	Nos	4	8,000	32,000
	c) 2.0 Ton SAC	Nos	-	-	-
2	Estimate additional copper piping with insulation for split units make( Muller) (charged as per final measurement on site). The return and supply copper tubing to be sized as per manufacturer's recommendation and to be drawn in separate Aeroflex insulators with gray tape.	rft	230	750	172,500
3	Provide & fix UPVC, 1-1/4" dia and 1" dia pipe, Beta or popular , for AC drain system, (medium) conforming to BSS 1307 of 1957, along with PVC fittings such as tees, elbows, unions, reducers, sockets, Teflon tape for jointing, hangers, supports, sleeves, including testing and commissioning and insulation with Aero flex insulation.	rft	180	200	36,000
4	Providing and installing M.S angle iron brackets, treated with rust.	Set	5	4,000	20,000
<b>TOTAL CIVIL WORKS.....</b>					<b>268,500</b>

**G.A WOODS**


**UTILIZATION OF EXISTING ITEMS ( removal & installation of items of dera murad jamali )**

S#	ITEMS	UNIT	QTY	RATE	AMOUNT
1	Glass Doors (Main Entrance, ATM AM Cabin) job includes new floor machines	NOS	4	20000	80000
2	Glass Partition (Area Manager & ATM Cabin)	SFT	130	377	49010
3	All wooden Furniture (Chairs Cleaning+tables+02 Cash Counters)	JOB	1	80000	80000
4	All Steel Items (Vault Room Door 02, Safe+SS Card Trolley+Fire Almrah+ Locker	JOB	1	80000	80000
5	Main Cable	JOB	1	25000	25000
6	Main DB	JOB	1	30000	30000
7	UPS DB	JOB	1	25000	25000
8	IT Rack & Patch Panel	JOB	1	31000	31000
	<b>TOTAL</b>				<b>400010</b>

**G.A WOODS**

A handwritten signature and initials are written on lined paper. The signature is a cursive name, possibly 'John', followed by a large, stylized initial 'J'. The initials 'JH' are written below the signature. The paper has horizontal lines and a vertical margin line on the left.

**COMPARISON OF COST OF RENOVATION WORKS- DERA MURAD JAMALI BRANCH**  
**SINDH BANK LTD**

Area 2275 sft		Latifi Enterprises	GA WOODS
S#	DESCRIPTION	AMOUNT	AMOUNT
A	CIVIL WORKS	1,192,775	1,695,050
B	PLUMBING WORKS	172,400	326,500
C	ELECTRICAL WORKS <i>11000</i>	540,400	632,000
D	HVAC	182,750	268,500
E	Shifting & Installation of Items from Dera murad Jamali Br to New premises	325,000	400,010
TOTAL RENOVATION COST .....		2,413,325	3,327,060

**SIGNATURE MEMBERS PC-ADMIN**

Head - Fin Div.

Head - Admin Div.

Member-IDBL

Date:

—

**SAC KATHRE MEMBERS PC-ADMIN**

S#	DESCRIPTION	UNIT	QTY.	RATE	AMOUNT	RATE	AMOUNT
3	Plain cement Concrete (Cement as per Market rate) Providing, laying, average 4" thick Flooring (1:3:6) at wash room, kitchen raised floor of 1250 psi compressive strength under any type of flooring using best Quality OPC/Sulphate Resistant cement and local approved quality sand and crushed stone, form work and its removal, with necessary arrangements where required excluding base of tiles complete in all respects as per approval of bank's engineer. Cement: Falcon, Lucky Pakland, D.G. Khan Sand: Hyderabad Bolari /Malir River/Hub Crush: Hub 3/4" and Kot Banglo for Interior Sindh	CFT	50	320	16,000	900	45,000
4	REINFORCED CEMENT CONCRETE (Vault Room as per Layout Plan). Providing and laying, compacting finishing & curing etc. straight or curved cast in place designed mix 1:2:4 Reinforced Cement Concrete using 1 Part of Ordinary Portland Cement or equivalent, 2 Parts of silt free local sand and 4 Parts of 3/4" thick downgraded crushed stone, mixed in a manner to achieve a cube strength of 3000 psi in 28 days, including mixing, transporting, hoisting, lifting & placing at any height / depth, vibrating and curing etc. Complete in all respect including cost of Steel Reinforcement (3/8" dia steel bars G-60 @ 6" C/C both ways, staggered double jaal in a manner that the alternate spacing b/w bars should not increase 3" C/C) & form work for Cement Concrete including cutting, bending, laying in position, making joint and fastening, removal of rust from bars, cost of binding wire and labor charges for binding of steel reinforcement, also includes cost of form work and its removal. Complete in all respects, 6" thick walls, and column or as per direction of Engineer	CFT	200	980	196,000	1,100	220,000
5	Block / Brick Masonry works. Providing & laying Block / Brick masonry walls including racking of joints with 1:4 cement sand mortar, the job includes Two 3/8" dia steel bars of 2'-0" length on both sides of wall at every 3'-0" ft height for anchoring of masonry with the sides and Two 3/8" dia bars of 2'-0" length at every third block length for anchoring masonry walls to plinth/floor beams, complete in all respect as per drawing, specifications, to the satisfaction of Architect / bank's engineer. 4" thick Block Masonry internal walls (First class Machine made Blocks)	SFT	950	160	152,000	200	190,000

SIGNATURE MEMBERS PC-ADMIN

Date: \_\_\_\_\_

Member-ICEL, \_\_\_\_\_

Head - Admin Div, \_\_\_\_\_

Head - Fin Div, \_\_\_\_\_

S#	DESCRIPTION	UNIT	QTY.	RATE	AMOUNT	RATE	AMOUNT
6	Plaster Works.						
	Providing & laying $\frac{3}{4}$ " thick cement sand plaster (Internal / External) with 1:4 cement sand mortar on walls, columns, beams, using best quality O.P.C., including 6" inches wide mesh at joints of structure with block masonry and over conduiting, smooth trowel finish complete in all respect. (This includes all the base plaster require for making diagonal and alignment for the existing walls) as per satisfaction of Architect / bank's engineer.	SFT	2500	60	150,000	100	250,000
7	Flooring, Elevation & Special Finishes.						
	Providing and laying glazed full body Porcelain tiles 24" X 24" at floor, of approved design, colour and pattern, china bone colour or Master or equivalent full body porcelain, setting in Stile dry bond (with cement), with matching color imported Grout. Complete in all respect, including cutting, cleaning, finishing & hacking/chipping of existing surface for bonding where necessary, and 4 inches wide skirting at walls of the same tiles as above mentioned, with 1:2:4 P.C.C. 50 mm thick, etc. as per specifications and/or as directed by the Architect / Engineer (at any elevation)	SFT	0	0			

SIGNATURE MEMBERS PC-ADMIN  
 Head - Fin Div.  
 Head - Admin Div.  
 Member-IOBL.  
 Date:

S#	DESCRIPTION	UNIT	QTY.	RATE	AMOUNT	RATE	AMOUNT
8	FALSE CEILING						
	Gypsum Board (24"x24")						
	Providing & laying 8 mm thick gypsum board False Ceiling, 24" x 24" Elephant Brand or approved equivalent in straight, curved, tiles or multiple profiles, as shown on drawing section, fixed with imported powder coated, with groove, aluminum, "T" & "J," section with ceiling suspension system having provisions for light and AC, grill. Complete in all respect as per drawing and instruction of Bank's Engineer.	SFT	950	130	123,500	200	190,000
9	Ceramic Tiles						
	Toilet:						
a	Providing / Laying wash room tiles (HMD45-117 9"x17" SB for floor & walls upto 4 feet height (Master brand) or equivalent as per approved shade & layout pattern with 2" thick base concrete including grouting of joint with matching grout material of Stile, complete in all respect as per satisfaction of Architect / bank engineer.	SFT	250	320	80,000	400	100,000
b	Kitchen/Pantry: Providing / Laying Pantry tiles (HMD38-50SF 9" x 17" SB for floor & walls upto 5 feet height (Master brand) or equivalent as per approved shade & layout pattern with 2" thick base concrete including grouting of joint with matching grout material of Stile, complete in all respect as per satisfaction of Architect / bank engineer.	SFT	50	320	16,000	400	20,000
10	Marble						
	Providing & fixing pre polished 3/4" thick Marble Top quality with approved size and shade over 2" thick pre cast RCC slab including 1/2" thick gola, grouting and jointing including cost of cutting of marble for basin and sink bowl including filling with silicone around joint of marble complete in all respect as per satisfaction by the engineer.						
	Pantry Counter Top (Botchra)	SFT	16	750	12,000	1,000	16,000

SIGNATURE MEMBERS PC-ADMIN  
 Head - Finance  
 Head - Admin Div.  
 Member-IDEAL  
 Date:



Sl#	DESCRIPTION	UNIT	QTY.	RATE	AMOUNT	RATE	AMOUNT
11	<b>WOODEN CABINETS</b>						
	<b>Kitchen Cabinets</b>						
	<b>Lower Unit:</b>						
a	Providing, fabricating and fixing in position pantry cabinets 24" deep 32" high consisting of 3/4" thick laminated board (Furniture color) of SONEX, Noor or equivalent on front shutter and drawers. Dark grey on internal box and shelves moulding 1/2"x3/4" including nails, screws, bolts, imported hinges, catchers, locks, handles, 3 coat of spirit polish of matching shade of furniture color on wood tipping and wood preservative treatment including premium quality ceramic tiles above 4" thick P.C.C floor platform complete in all respects as per drawings and as directed by the bank's Engineer.	SFT	18	1250	22,500	1,200	21,600
	all kind of best quality hardware's, spring hinges, SS handles, locks etc. Complete in all respects.						
	<b>Upper Unit:</b>						
b	Providing, fabricating and fixing in position pantry cabinets 12" deep and 24" high (Hanging) consisting of 3/4" thick laminated board (Furniture color) of SONEX, Al Noor or equivalent on front shutter and drawers. Dark grey on internal box and shelves moulding 1/2"x3/4" including nails, screws, bolts, imported hinges, catchers, locks, handles, 03 coat of spirit polish of matching shade of furniture color on wood tipping and wood preservative treatment complete in all respects as per drawings and as directed by the bank's Engineer.	SFT	20	1250	25,000	1,200	24,000
12	<b>Paint at Walls</b>						
	Providing and applying, 2 coats of ICI Matt Finish Paint Ash White (3130) or BERGER or equivalent of approved colour and shade, at any floor & at any height over one coat of primer and making smooth and even surface by applying ICI Paintex base filling as per specifications, to surface of walls, complete in all respects as specified and as approved by the bank's Engineer.	SFT	2500	55	137,500	70	175,000
13	<b>WOODEN DOOR / FRAME / CHOWKAT / Beading</b>						
a	<b>DOOR FRAME:</b> Providing and fixing of required width, 16 SWG, GI door frames for Toilets, kitchen, stores & cash counter with polishing, including lintels, hold fasts, where ever required, complete in all respect including painting / polish with proper beach / diyar wood beading.	NO	5	7500	37,500	10,000	50,000

Head - PC-ADMIN  
 Head - PC-ADMIN  
 Member-PC-ADMIN  
 Date:

S#	DESCRIPTION	UNIT	QTY.	RATE	AMOUNT	RATE	AMOUNT
b	SKIN DOORS, 1-1/2 inches thick (for Toilets, Kitchen, stores & cash counter) Provide and install doors consisting of best quality Malaysian skin, pressed over best quality treated partial wood framing, with approved quality of door locks, handle, tower bolt, hold fast, stopper, hardware and paint /polish, complete in all respect.	SFT	105	450	47,250	800	84,000
14	INSTALLATION OF VAULT/LOCKER ROOM DOOR						
	Lifting & Fixing charges of Bank's supplied Vault / Locker Doors, welding of door frame with RCC MS bars, and to facilitate the Vendors. Complete in all respects.	NO	1	15000	15,000	10,000	10,000
15	Wrought Iron Grills for external windows, AC Outlets (If necessary)						
	Approved design grills for all external windows & Ac Outlets/exhaust fans (if required). The security grills will be installed from inside so that glass will be visible from outside. MS Grill comprising of 1/2" solid square bars @ 6" c/c 1"x1-1/2" MS 16 gauge angle iron, welding, grinding, finishing, rubbing 3 coat of enamel paint (ICI,NIPPON,BERGER or equivalent) red oxide before paint. Complete in all respects, as per standardized design and /or as shown in drawing as per approved design, attached herewith. Further proper lockable grills with above specification will also be provided for all AC outdoor units.	SFT	150	590	88,500	700	105,000
16	M.S DOOR on (ATM, Internal, Emergency & Guard Post)						
	Fabricating, providing and fixing MS door with 16 S.W.G. M.S 3/4" square pipe, 16 SWG MS sheet pressed over this frame including metal door frame, at both sides, sheet frame painted with approved enamel color including 2" x 5" eye level opening with proper MS shutter of 16 swg sheet to look outside , including best quality hinges, locks, handles, hold fasts and other necessary hardware etc. size as per site. Complete in all respects as per drawing attached herewith. Specifications and as directed by the Bank.	SFT	42	950	39,900	1,100	46,200
	<b>TOTAL CIVIL WORKS.....</b>				<b>1,192,775</b>		<b>1,695,050</b>

Head - Finance  
 Head - Admin  
 Member-JCL  
 SIGNATURE MEMBERS PC-ADMIN

**BILL OF QUANTITY**  
**Renovation Works- Dera Murad Jamali Branch**

S.No.	DESCRIPTION	UNIT	QTY	Latifi Enterprises		GA WOODS	
				RATE	AMOUNT	RATE	AMOUNT
1(a)	Providing and fixing European type ceramics ware coupled water closet, ICL IFO or DURA, equivalent white / light colour, including 3 gallons cistern, P/S trap, C/P tee stop cock with wall cups, connection pipes, "SONEX", "MASTER (Royal)", hinged double bacolite seat and cover of best quality, all joints to services and drains, plugging and screwing as necessary to the structure and make good the same, complete in all respect as per specifications and drawings.	Nos	1	13,500	13,500	40,000	40,000
(b)	Providing and fitting Glazed earthen ware water closet, squat type (Jhisa pattern), combined with foot rest, Best Quality including Plastic made Flushing tank, SONEX tee stop cock for cistern water inlet and C/P connector with nuts and fitting, approved other ancillary material complete in all respect.	Nos	1	10,000	10,000	25,000	25,000
2	Providing and fixing Wash hand Basin Vanity type, ICL IFO or DURA or equivalent white colour "SONEX"/ "MASTER" waste coupling, plug with C/P brass chain, 1.5" dia. P.V.C (D type) waste pipe connections to water lines, tee stop cock for cold and hot water inlet connector with nuts and fitting, waste pipe waste coupling, plugs with chain other ancillary material C/P grating including C/P bottle trap, testing etc. complete in all respect and as directed by the Engineer.	Nos.	2	9,500	19,000	25,000	50,000

Date: \_\_\_\_\_


SIGNATURE MEMBERS PC-ADMIN

Head - Fin Div.

Head - Admin Div.

Member-ICCL

S.No.	DESCRIPTION	UNIT	QTY	RATE	AMOUNT	RATE	AMOUNT
	Provide & fix best quality Stainless Steel imported Kitchen Sink, Balteco or equivalent make (40" x 20") 1000mm x 500mm sink with CI or W1 brackets 150mm (6") built in wall, 40mm(1 1/2") rubber plug & chrome plated brass chain, 40mm (1 1/2") C.P brass waste, pillar tap 2 way deluxe, 40 mm (1 1/2") dial malleable iron or C.P. brass trap, Bottle trap and unions. Make requisite holes in walls & floor for pipe connections & make good with approved material (with SONEX fittings).	Nos.	1	8,500	8,500	8,000	8,000
4	Provide & fix uPVC floor drains of 4" dia of make Nikkasi or approved equivalent, having minimum guaranteed 2" water seal with screw down C.P cover, peripheral drains with or without a vent arm. Make requisite holes in walls, floor for pipe connections & make good with approved material, including SS drain / grating with side perforation.	Nos.	3	2,000	6,000	1,500	4,500
5	Provide & fix approved quality chromium plated towel rails, 750mm x 20mm (30"x3/4") with brackets and C.P screws. (Taiwan make)	Nos.	2	2,000	4,000	3,000	6,000
6	Provide and fix approved quality C.P toilet paper holders and coat hook. (Taiwan make)	Nos.	2	2,000	4,000	3,000	6,000
7	Provide & fix p soap dish of approved quality with C.P screws. (Master/Sonex)(White color)	Nos.	2	5,000	10,000	3,000	6,000
8 (a)	Provide and fix Muslim Showers manufactured by Master/Sonex or equivalent, complete with stop cock and controlled spray head (White color)	Nos.	2	5,500	11,000	10,000	20,000
(b)	Providing and fixing 15 mm dia C.P. mixer with C.P pipe 15 mm dia, of Master, Sonex or approved equal complete including pipe connections, all fittings, testing etc. (White color)						
i) For Wash basin		Nos.	2	5,000	10,000	9,000	18,000
ii) Kitchen Sink Mixer		Nos.	1	5,500	5,500	9,000	9,000

  
 Head of the  
 NIMROD MEMBERS PC-ADMIN



S.No.	DESCRIPTION	UNIT	QTY	RATE	AMOUNT	RATE	AMOUNT
i	Dia 2"	rf					
ii	Dia 3"	rf	20	350	7,000	650	13,000
iii	Dia 4"	rf	20	450	9,000	700	14,000
12	Provide and construct gully trap with 12"x12" cast iron frame and cover, including excavation, backfilling, masonry, plaster internally and externally vitreous China trap etc. complete and approved by the Engineer.	Nos.					
13	Provide and construct man holes for sewer with 24"x24" C.I frame and cover (40kg) including 8" Masonry, puddle plaster internally and externally up to depths shown on drawings and approved by the Engineer. PCC 1:2:4 base slab, benching with 1:3 cement sand mortar including 24" dia manhole cover, frame and rungs, complete in all respect	Nos.					
14	Providing, installing & testing of Over Head Fiber Glass Water Tank make Dura or approved equivalent, with 300 Gallons storage capacity, including electric pump, motor and all necessary fittings etc. Complete in all respects as per instruction of Architect.	No	1	28,000	28,000	37,000	37,000
					172,400		326,500









S.No.	DESCRIPTION	UNIT	QTY	Rate	Amount	Rate	Amount
9	Providing installing & wiring for Split A/C's unit from distribution board to respective 1-3 pin 16 Amps switch socket, wired with 2x6mm <sup>2</sup> + 1x4mm <sup>2</sup> 1 core CU/PVC cable in 25mm dia PVC conduit make Beta, Popular, recessed in wall/floor, above false ceiling or as required as per site conditions, all PVC conduit make Beta accessories, pull boxes, steel pull wireset. (Complete with all conduit & wiring) accessories including 16 Amps, 3 pin combined switch socket make Clipsal (Austria), MK(UK), Legrand (France) or approved equivalent. Wiring shall be done directly from the MCB installed in the respective DB without any claim of circuit, complete with suitable size 1.5mm thick sheet steel back box recessed in wall. (Complete with all accessories including termination.	Nos.	5	9,000	45,000	11,000	55,000
10	Providing, Installation, testing & commissioning of light fixtures & other accessories, complete with all accessories such as, Chain, Rod, Screw, foundation for garden light etc. (Complete in all respect with chokes (ballast), lamp holders, starters, power factor correction capacitor, tube rods internal wiring, earthing terminal.	Nos.	1	9,500	9,500	11,000	11,000
11	Supply, installation and commissioning of Exhaust / Bracket Fans of following sizes, plastic body, louvers, all necessary fixing accessories, make Asia, Climax, National or as manufactured by any one of the manufacturers as mentioned in Annexure-7A. Complete in all respects.	Nos.	3	4,500	13,500	7,000	21,000
	Exhaust Fan 12" dia	Nos.	3	4,500	13,500	7,000	21,000
	Wall Bracket Fan 24" dia	Nos.	2	5,500	11,000	8,000	16,000

Head - Admin  
 Head - Admin  
 Head - Admin  
 Head - Admin

S.No.	DESCRIPTION	UNIT	QTY	Rate	Amount	Rate	Amount
<b>12. L.T POWER CABLES</b>							
	Providing, laying, testing and commissioning of following size single or multicore PVC/PVC cable 600/1000 volts grades, manufactured by Pakistan Cables, AGCL, Pioneer, in suitable PVC conduit concealed in floor / wall as shown on drawings, and as per instruction of Consultant						
i)	25mm <sup>2</sup> 4core cu/pvc/pvc cable from main connection to Main DB	Mtrs.	10	3,000	30,000	5,000	50,000
ii)	10mm <sup>2</sup> 4core cu/pvc/pvc cable Main DB to UPS DB & looping	Mtrs.	10	2,000	20,000	2,000	20,000
iv)	6mm <sup>2</sup> 4core cu/pvc/pvc cable + 2x4mm <sup>2</sup> 1core cu/pvc cable	Mtrs.	0	-	-	-	-
<b>13. TELEPHONE SYSTEM</b>							
i)	Providing & wiring of each Telephone socket outlet in preinstalled outlet boxes, wired with 4 Pair Cat-6 (UTP) Cable, make 3M / PANDUIT USA in 25mm dia PVC conduit recessed in slabs, floors, walls, columns or on slab above false ceiling or as required as per site conditions, complete with all conduit & wiring accessories including RJ-45 ICs & Face Plates. Complete in all respect with suitable size 1.5mm thick sheet steel back box recessed in wall.	Nos.	7	6,500	45,500	7,000	49,000
ii)	Providing, laying, testing and commissioning of 20 Pairs Telephone Cable, of Siemens, in 32mm dia pvc class-d pipe	Mtrs.	20	300	6,000	700	14,000
<b>14. COMPUTER NET WORKING SYSTEM</b>							
	Providing, laying & testing of Data Cable 4 Pair Cat-6, make 3M / PANDUIT USA in 25 mm dia PVC conduit including Data Outlet (3M make) face plate (2port) w/o shutter RJ-45 (Panduit USA) K6 Jack, fixed, on 1.5 mm thick steel back box complete in all respect and as per drawing, and providing of Fluke Test Report & 3M's 20 Years Certificate (Complete as per Client's requirement)	Nos.	8	6,500	52,000	7,500	60,000

## 12. L.T POWER CABLES

Providing, laying, testing and commissioning of following size single or multicore PVC/PPVC cable 600/1000 volts grades, manufactured by [Kaiser Cables, AGIL, Pioneer, in suitable PVC] conduit concealed in floor / wall as shown on drawings, and as per instruction of consultant.

ii)	25mm <sup>2</sup> 4core cu/pvc/pvc cable from main connection to Main DB	Mtrs.	10	3,000	30,000	5,000	50,000
	10mm <sup>2</sup> 4core cu/pvc/pvc cable Main DB to UPS DB & Looping	Mtrs.	10	2,000	20,000	2,000	20,000
iii)	6mm <sup>2</sup> 4core cu/pvc/pvc cable + 2x4mm <sup>2</sup> 1core cu/pvc cable	Mtrs.	0	-	-	-	-

### 13. TELEPHONE SYSTEM

Providing & wiring of each **Telephone** socket outlet in preinstalled outlet boxes, wired with 4 Pair Cat-6 (UTP) cable, make 3M / PANDUIT (USA) in 25mm dia PVC conduit recessed in slabs, floors, walls, columns or on slab above false ceiling or as required as per site conditions, complete with all conduit & wiring accessories including RJ-45 ICs & Face Plates. Comply in all respect with suitable size 11.5mm thick sheet steel back box recessed in wall.




ii	Providing, laying, testing and commissioning of 20 pairs telephone cable, of Siemens, in 32mm dia pvc class-d pipe	Mtrs.	20	300	6,000	700	14,000
----	--	-------	----	-----	-------	-----	--------

#### 14. COMPUTER NET WORKING SYSTEM

Providing, laying & testing of **Data Cable** 4 Pair Cat-6, make 3M / PANDUIT USA in 25 mm dia PVC conduit including Data Joints (3M make) Face plate (2port) w/o shutter RJ-45 (Panduit USA) K6 Jack, fixed, on 1.5 mm thick steel back box complete in all respect and as per drawing and providing of Plate Test Report & 3M's 20 Years Certificate (Complete as per Client's requirement)

[illegible]



S.No.	DESCRIPTION	UNIT	QTY	Rate	Amount	Rate	Amount
15.	<b>EARTHING SYSTEM</b> Providing, installation, commissioning and testing of (TWC) earthing pits (40 to 50 ft deep or up to water level), back filling, ranning etc. complete with copper earth electrode 25mm dia and 1.5 meter long, as indicated in specification and drawings. 16 mm copper wire from electrode to I/C/P and to all DBs. (complete with cable clamps 38mm dia C.I. pipe till electrode from I/C/P, with "1", plug, for water refilling and all accessories as per drawings. Each earth pit is to be provided with a concrete manhole 300 x 300 x 450(mm) deep with 225mm thick wall including cement mortar, internal plaster 1:4, with heavy duty C.I. cover including test clamp. (Complete in all respect. Earthing bores shall be made at 6 to 8 feet away from foundation and distance between earth pits shall not be less than 10 feet. Further connection of earth pit to all DBs with proper earth wire. In case where earth bore is not possible, due to hilly area, copper plate earth, having size 12X2X1/4", with two 10 SWG 16 mm copper wires, tight on plates with brass nut / bolt, plate buried in 6 to 8 feet deep in earth will be provided with (IPVC) pipe for water refilling fro ground level till earth plate.	Nos	1	45,000	45,000	45,000	45,000
<b>Total - Electrical works</b>					540,400		637,000

ENGINEER PC-ADMIN  
 HEAD - ELECTRICAL  
 HEAD - MECHANICAL

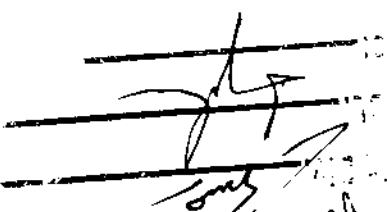
**AIRCONDITIONING / HVAC WORKS :**

S#	DESCRIPTION	UNIT	QTY.	Latifi Enterprises		GA WOODS	
				RATE	AMOUNT	RATE	AMOUNT
1	Installation of Split Air Conditioners (SAC) including LSA						
	a) 1.0 Ton SAC	Nos	1	5,000	5,000	8,000	8,000
	b) 1.5 Ton SAC	Nos	4	5,000	20,000	8,000	32,000
	c) 2.0 Ton SAC	Nos					
2	Estimate additional copper piping with insulation for split units (make/ Muller) (charged as per final measurement on site). The return and supply copper tubing to be sized as per manufacturer's recommendation and to be drawn in separate Aero flex insulators with gray tape.	ft	230	525	120,750	750	172,500
3	Provide & fix UPVC, 1-1/4" dia and 1" dia pipe, Beta or popular, for AC drain system, (medium) conforming to BSS, 1307 of 1957, along with PVC fittings such as tees, elbows, unions, reducers, sockets, Teflon tape for jointing, hangers, supports, sleeves, including testing and commissioning and insulation with Aero flex insulation.	ft	180	150	27,000	200	36,000
4	Providing and installing M.S angle iron brackets, treated with rust	Set	5	2,000	10,000	4,000	20,000
<b>TOTAL HVAC WORKS.....</b>					<b>182,750</b>		<b>268,500</b>

  
  
 PROJECT MANAGER / PO / BMM

**E.UTILIZATION OF EXISTING ITEMS (Removal & installation of items)**




S#	Items	Units	Qty	Latifi Enterprises		GA WOODS	
				Rate	Amount	Rate	Amount
1	Glass Doors (Main Entrance, ATM AM Cabin) job includes new floor machines	Nos	4	15,000	60,000	20,000	80,000
2	Glass Partition (Area Manager Cabin)	Sft	130	400	52,000	377	49,010
3	All wooden Furniture (Chairs Cleaning+tables+02 Cash Counters)	Job	1	40,000	40,000	80,000	80,000
4	All Steel Items (Vault Room Door 01, Safe+SS Card Trolley+Fire Almrh)	Complete in all respect	1	140,000	140,000	80,000	80,000
5	Main Cable	Job	1	10,000	10,000	25,000	25,000
6	Main DB	Job	1	10,000	10,000	30,000	30,000
7	UPS DB	Job	1	8,000	8,000	25,000	25,000
8	IT Rack & Patch Panel	Job	1	5,000	5,000	31,000	31,000
	<b>Total</b>				<b>325,000</b>		<b>400,010</b>

  
 Date: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_




**SUMMARY OF EVALUATION FOR RENOVATION OF DERA MURAD JAMALI BRANCH**

S.No			Contractors		Status of Firm		Points Obtained	Years in Business(Only Dealing in Banks/ Financial Institution)			Points Obtained	Branches up till now constructed / renovated for the banks/financial institutions		Points Obtained	Average Turn Over in last three years		Points Obtained	Grand Total	Qualified (70%) marks / Disqualified				
					Total Points	Private Limited / Partnership		Sole Proprietorship	Total Points	5 Years & above		2 Years & above	1 Year & above		Total Points	6 Branches & Above				4 Branches & Above	Total Points	1 million & Above	0.5 million & Above
1	Latifi Enterprises		10	20		15		10		40		40		20		10		85	Qualified				
2	G.A Woods		10	20		20				40		40		20				90	Qualified				

**Members Signature- Evaluation Team**



  
M. Amir Iqbal      Fouzia Shahnaim      Taimoor Ensaaf  
Admin Division      Operation Division      Finance Division

**Members Signature- Procurement Committee**



  
Agha Abbas Soomro      Dildard Hussain Khan      Syed Muhammad Aqeel  
Head of Administration      Chief Financial Officer      Chief Manager, IDBL Karachi


) )


MANDATORY / DISQUALIFICATION CONDITIONS


RENOVATION OF DERA MURAD JAMALI BRANCH

S.No	Contractors	Submission of Black Listing Affidavit (Yes/No)	FBR Registration/ SRB/ Provincial Revenue Collecting Authority (Yes/No)	Alternate Bid Offered (Yes/No)	Tender Fee Submitted (Yes/No)	2 X Warning Letters issued by SNDB (Yes/No)	Blacklisted on SPPRA/Sindh Bank Ltd (Yes/No)	Qualified / DisQualified
1	Latifi Enterprises	Yes	Yes	No	Yes	No	No	Qualified
2	G.A Woods	Yes	Yes	No	Yes	No	No	Qualified


Members Signature- Evaluation Team


  
M. Athar Iqbal  
Admin Division


  
Fouzia Shamim  
Operation Division

  
Zeinobor Ghauri  
Finance Division

Members Signature- Procurement Committee

  
1. Arshad Abbas Soomro  
HEAD OF ADMINISTRATION

  
2. Dilshad Hussain  
CFO

  
3. Syed Muhammad Aqeel  
Chief Manager, IDBL