

# SINDH PUBLIC PROCUREMENT REGULATORY AUTHORITY

## **CONTRACT EVALUATION FORM**

### **TO BE FILLED IN BY ALL PROCURING AGENCIES FOR PUBLIC CONTRACTS OF WORKS, SERVICES & GOODS**

- Sindh Bank Limited
- 1) NAME OF THE ORGANIZATION / DEPTT. \_\_\_\_\_
- 2) PROVINCIAL / LOCAL GOVT. / OTHER Scheduled Bank
- 3) TITLE OF CONTRACT Renovation of Wah Cantt Branch, Rawalpindi
- 4) TENDER NUMBER SNDB/COK/ADMIN/TD/1321/2023
- 5) BRIEF DESCRIPTION OF CONTRACT Renovation Of Wah Cantt Branch, Rawalpindi
- 6) FORUM THAT APPROVED THE SCHEME Competent Authority
- 7) TENDER ESTIMATED VALUE Rs. 3,095,850/-
- 8) ENGINEER'S ESTIMATE  
(For civil works only) \_\_\_\_\_
- 9) ESTIMATED COMPLETION PERIOD (AS PER CONTRACT) 45 Days
- 10) TENDER OPENED ON (DATE & TIME) 17/05/2023 at 1130 Hrs.
- 11) NUMBER OF TENDER DOCUMENTS SOLD 05  
(Attach list of buyers)
- 12) NUMBER OF BIDS RECEIVED 05
- 13) NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS 05
- 14) BID EVALUATION REPORT 31/05/2023  
(Enclose a copy)
- 15) NAME AND ADDRESS OF THE SUCCESSFUL BIDDER M/s. Digi Com Technologies (Pvt.) Ltd. Add: A-302, 3rd Floor, Anum Classic, Shahrah.e.Faisal, Karachi.
- 16) CONTRACT AWARD PRICE Rs. 3,095,850/-
- 17) RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT  
(i.e. 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> EVALUATION BID).
1. M/s. Digi Com Technologies (Pvt.) Ltd.  
2. M/s. Latifi Enterprises  
3. M/s. Arcila Traders & Contractor  
4. M/s. Z.A Construction

18) METHOD OF PROCUREMENT USED : - (Tick one)

- a) SINGLE STAGE – ONE ENVELOPE PROCEDURE \_\_\_\_\_  Domestic/ Local
- b) SINGLE STAGE – TWO ENVELOPE PROCEDURE \_\_\_\_\_
- c) TWO STAGE BIDDING PROCEDURE \_\_\_\_\_
- d) TWO STAGE – TWO ENVELOPE BIDDING PROCEDURE \_\_\_\_\_

PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED i.e. EMERGENCY, DIRECT CONTRACTING ETC. WITH BRIEF REASONS:

19) APPROVING AUTHORITY FOR AWARD OF CONTRACT \_\_\_\_\_

20) WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

21) ADVERTISEMENT :

i) SPPRA Website  
(If yes, give date and SPPRA Identification No.)

Yes	SPPRA NIT T00531-22-0041 (28/04/2023)
No	No

ii) News Papers  
(If yes, give names of newspapers and dates)

Yes	Express Tribune (English) , Daily Express (Urdu), Sobh (Sindh) - (28/04/2023)
No	

22) NATURE OF CONTRACT

Domestic/Local	<input checked="" type="checkbox"/>	Int.	<input type="checkbox"/>
----------------	-------------------------------------	------	--------------------------

23) WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?  
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

24) WHETHER BID EVALUATION CRITERIA WAS INCLUDED IN BIDDING / TENDER DOCUMENTS?  
(If yes, enclose a copy)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

25) WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING?

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

26) WAS BID SECURITY OBTAINED FROM ALL THE BIDDERS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

27) WHETHER THE SUCCESSFUL BID WAS LOWEST EVALUATED BID / BEST EVALUATED BID (in case of Consultancies)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

28) WHETHER THE SUCCESSFUL BIDDER WAS TECHNICALLY COMPLIANT?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

29) WHETHER NAMES OF THE BIDDERS AND THEIR QUOTED PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

30) WHETHER EVALUATION REPORT GIVEN TO BIDDERS BEFORE THE AWARD OF CONTRACT?

(Attach copy of the bid evaluation report)

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

31) ANY COMPLAINTS RECEIVED  
(If yes, result thereof)

Yes	
No	No

32) ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE / DOCUMENTS  
(If yes, give details)

Yes	
No	No

33) WAS THE EXTENSION MADE IN RESPONSE TIME?  
(If yes, give reasons)

Yes	
No	No

34) DEVIATION FROM QUALIFICATION CRITERIA  
(If yes, give details and reasons.)

Yes	
No	No

35) WAS IT ASSURED BY THE PROCURING AGENCY THAT THE SELECTED FIRM IS NOT BLACK LISTED?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

36) WAS A VISIT MADE BY ANY OFFICER/OFFICIAL OF THE PROCURING AGENCY TO THE SUPPLIER'S PREMISES IN CONNECTION WITH THE PROCUREMENT? IF SO, DETAILS TO BE ASCERTAINED REGARDING FINANCING COMMIT, IF A ROAD:  
(If yes, enclose a copy)

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

37) WERE PROPER SAFEGUARDS PROVIDED ON MOBILIZATION ADVANCE PAYMENT IN THE CONTRACT (BANK GUARANTEE ETC.)?

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

38) SPECIAL CONDITIONS, IF ANY  
(If yes, give Brief Description)

Yes	
No	No

Signature & Official Stamp of  
Authorized Officer

Muhammad Ather Iqbal  
Incharge Procurement  
Sindh Bank Ltd  
Head Office  
5/06

**FOR OFFICE USE ONLY**

**SPPRA, Block. No.8, Sindh Secretariat No.4-A, Court Road, Karachi**  
**Tele: 021-9205356; 021-9205369 & Fax: 021-9206291**

**BUYER LIST****Renovation of Wah Cant - (1321)**

S.NO	COMPANY NAME	TENDER FEE	PST	TOTAL	PAY ORDER NO	NAME OF BANK
01	Digi Com Technologies (Pvt.) Ltd.	1000	150	1150	02526873	Silk Bank
02	Latifi Enterprises	1000	150	1150	01171071	Sindh Bnak Ltd.
03	Z.A Construction	300	0	300	00002082	Bank Alfalah
04	Ashi Enterprises	1000	150	1150	06253126	Soneri Babk
05	Arcika Traders & Contractor	1000	150	1150	04038104	BOP
<b>Grand Total</b>				<b>4,900/-</b>		

**Bid Evaluation Report**

**Renovation of Wah Cantt Branch, Rawalpindi**

1	Name of Procuring Agency	Sindh Bank Ltd.
2	Tender Reference No.	SNDB/COK/ADMIN/TD/1321/2023
3	Tender Description	Renovation of Wah Cantt Branch, Rawalpindi
4	Method of Procurement	Single Stage One Envelope Bidding Procedure
5	Tender Published & SPPRA S.No.	T00531-22-0041. Express Tribune (English) , Daily Express (Urdu), Sobh (Sindh) (28/04/2023)
6	Total Bid Documents Sold	05
7	Total Bids Received	05
8	Technical / Financial Bid Opening Date & Time	17/05/2023 at 1130 Hrs.
9	No. of bids qualified	04
10	Bid(s) Rejected / Disqualified	01

Details on the above as given below:

S No	Name of Firm or Bidder	Qualified / Disqualified in Technical / Eligibility Inspection/ Mandatory	Cost offered by the Bidder	Ranking in terms of cost	Comparison with Estimated cost (Rs.3,397,450/-)	Reasons for acceptance/ rejection	Remarks
1	2	3	4	5	6	7	
1.	M/s. Digi Com Technologies (Pvt.) Ltd.	Qualified	Rs.3,095,850/- (Area 1500 sq.ft x Rate per sq.ft Rs. 2,063.9)	1 <sup>st</sup> Lowest Bidder	Rs. 301,600/- below the estimated cost	1 <sup>st</sup> Lowest As Most Advantageous Bid	Accepted-Award of Contract
2.	M/s. Ashi Enterprises	Disqualified	Rs.3,596,083/- (Area 1500 sq.ft x Rate per sq.ft Rs. 2,397.38)	2 <sup>nd</sup> Lowest Bidder	Rs. 198,633/- Above the estimated cost	Disqualified due to non-fulfilment of eligibility criteria	---
3.	M/s. Latifi Enterprises	Qualified	Rs.3,686,214/- (Area 1500 sq.ft x Rate per sq.ft Rs. 2,457.47)	3 <sup>rd</sup> Lowest Bidder	Rs. 288,764/- Above the estimated cost	3 <sup>rd</sup> Lowest Evaluated Qualified Bidder	---
4	M/s. Arcika Traders & Contractor	Qualified	Rs.3,697,500/- (Area 1500 sq.ft x Rate per sq.ft Rs. 2,465)	4 <sup>th</sup> Lowest Bidder	Rs. 300,050/- Above the estimated cost	4 <sup>th</sup> Lowest Evaluated Qualified Bidder	---
5.	M/s. Z.A Construction	Qualified	Rs.3,893,100/- (Area 1500 sq.ft x Rate per sq.ft Rs. 2,595.4)	5 <sup>th</sup> Lowest Bidder	Rs. 495,650/- Above the estimated cost	5 <sup>th</sup> Lowest Evaluated Qualified Bidder	---


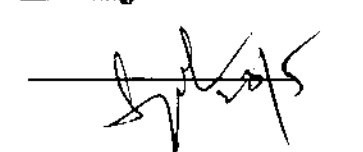
Accordingly, going by the Technical/Financial Evaluation criteria laid down in the tender document, M/s. Digi Com Technologies (Pvt.) Ltd. is the most advantageous bid and their bid is also below the estimated cost, hence recommended for award of contract to Renovation of Wah Cantt Branch, Rawalpindi to Sindh Bank Limited.

**Members Signature- Procurement Committee**

Arshad Abbas Soomro  
Head of Administration

Dilshad Hussain Khan  
Chief Financial Officer

Syed Muhammad Aqeel  
Chief Manager, IDBL Karachi

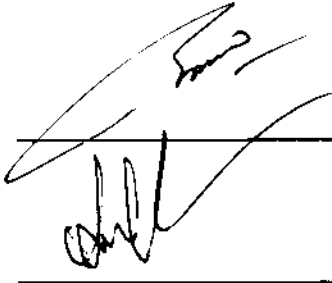
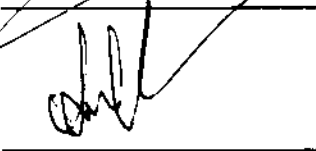
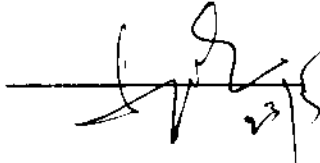
  


## CERTIFICATE

This is to certify that no complaint has been received in related to

Renovation of Wah Cantt Branch, Rawalpindi having Reference No.

SNDB/COK/ADMIN/TD/1321/2023 having SPPRA ID No: T00531-22-0041

<u>Members – Procurement Committee</u>	<u>Signature</u>
1) HEAD OF ADMINISTRATION	
2) CHIEF FINANCIAL OFFICER	
3) CHIEF MANAGER, IDBL	

**COMPARISON OF COST OF RENOVATION OF WAH CANT BRANCH RAWALPINDI**

Area 1500 sft

S#	DESCRIPTION	AMOUNT	AMOUNT	AMOUNT	AMOUNT	AMOUNT
		Digi Com Technologies (Pvt.) Ltd.	Ashi Enterprises	Latiff Enterprise	Amilka Traders & Contractor	Zah Construction
A	Civil Works	1,941,950	1,856,600	2,022,528	1,694,300	2,226,720
B	Plumbing Works	155,050	417,850	199,350	316,300	234,780
C	Electrical Works	437,500	653,500	725,013	768,400	640,700
D	HVAC	239,350	368,900	301,250	438,500	266,400
E	Shifting & Installation of Items from Existing Br to New premises	322,000	488,500	436,723	480,000	524,500
	Less: Discount 5%		189,267			
	<b>TOTAL RENOVATION COST</b>	<b>3,095,850</b>	<b>3,596,083</b>			


Head - Admin Div. [Signature]

Member-ICBL. [Signature]

Date: \_\_\_\_\_

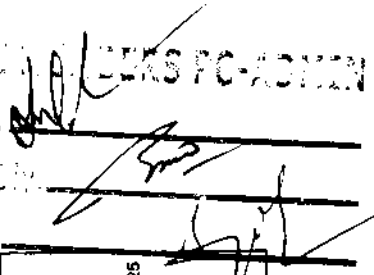
**BILL OF QUANTITY**  
**Renoavtion Works- Wah Cant Branch Rawalpindi**

S#	DESCRIPTION	UNIT	QTY.	RATE	AMOUNT	RATE	AMOUNT	RATE	AMOUNT	RATE	AMOUNT	RATE	AMOUNT
A	<b>CIVIL WORKS</b>												
1	Termite Proofing Providing and carrying out termite proofing using FIPROKILL/ BIFLEX / DURSABANE with a solution of 1 gallon of chemical to 50 gallons of water, spaying this solution @ 2 liters per sq. meter area (or liters per 10.76 sq. Area) with a pressure ensuring at least 3" penetration in the soil of the area to be treated. The contractor will provide a guarantee for a period of ten years against infestation of termite in the shape and mode approved by the Engineer, stating that in case of infestation, additional treatment will be provided by the contractor at no extra cost to the Client (horizontal & Vertical).	SFT	1500	30	45,000	35	52,500	21	31,500	60	90,000	20	30,000
2	<b>REINFORCED CEMENT CONCRETE (Vault Room &amp; Locker Rooms per Layout Plan).</b> Providing and laying, compacting finishing & curing etc. straight or curved cast- in place designed mix 1:2:4 Reinforced Cement Concrete using 1 Part of Ordinary Portland Cement or equivalent, 2 Parts of silt free local sand and 4 Parts of 3/4" thick downgraded crushed stone; mixed in a manner to achieve a cube strength of 3000 psi in 28 days, including mixing, transporting, hoisting, lifting & placing at any height / depth, vibrating and curing etc. Complete in all respect including cost of Steel Reinforcement (3/8" dia steel bars @ 60 @ 6" C/C both ways, staggered double jaal in a manner that the alternate spacing b/w bars should not increase 3" C/C) & form work for Cement Concrete including cutting, bending, laying in position, making joint and fastening, removal of rust from bars, cost of binding wire and labor charges for binding of steel reinforcement; also includes cost of form work and its removal. Complete in all respects, 5" thick walls, and column or as per direction of Engineer.	CFT	330	1150	379,500	1100	363,000	1654	545,820	690	227,700	2500	825,000
3	<b>Block / Brick Masonry works.</b> Providing & laying Block / Brick masonry walls including racking of joints with 1:4 cement sand mortar, the job includes Two 3/8" dia steel bars of 2'-0" length on both sides of wall at every 3'-0" ft height for anchoring of masonry with the slides and Two 3/8" dia bars of 2'-0" length at every third block length for anchoring masonry walls to plinth/floor beams, complete in all respect as per drawing, specifications, to the satisfaction of Architect / bank's engineer. 4" thick Block Masonry Internal walls (First class Machine made Blocks)	SFT	520	170	88,400	290	150,800	205	106,600	135	70,200	190	96,800
4	<b>Plaster Works.</b> Providing & laying 3/2" thick cement sand plaster (Internal / External) with 1:4 cement sand mortar on walls, columns, beams, using best quality O.P.C, including 6" inches wide mesh at joints of structure with block masonry and over conducting smooth trowel finish complete in all respect. (This includes all the base plaster require for making diagonal and alignment for the existing walls) as per satisfaction of Architect / bank's engineer.	SFT	2150	55	118,250	65	139,750	80	172,000	88	189,200	72	154,800



SIGNATURE MEMBERS PC-ADMIN  
  
 \_\_\_\_\_



Sl#	DESCRIPTION	UNIT	QTY.	RATE	AMOUNT	RATE	AMOUNT	RATE	AMOUNT	RATE	AMOUNT	RATE	AMOUNT
5	<b>FALSE CEILING</b> Gypsum Board (24"x24") Only at GF												
	Providing & laying 8 mm thick gypsum board False Ceiling, 24" x 24" Elephant Brand or approved equivalent in straight, curved, tiles or multiple profiles, as shown on drawing section, fixed with imported powder coated, with groove, aluminium, "T" & "L" section with ceiling suspension system having provisions for light and AC grill. Complete in all respect as per drawing and instruction of Bank's Engineer.	SFT	1450	135	195,750	170	246,500	149	216,050	140	203,000	150	217,500
6	<b>Ceramic Tiles</b> Toilet: Providing / Laying wash room tiles (HMD45-117 9"x17" SB for floor & walls upto 7 feet height (Master brand) or equivalent as per approved shade & layout pattern with 2" thick base concrete including grouting of joint with matching grout material of Stile, complete in all respect as per satisfaction of Architect / bank engineer. Kitchen/Pantry: Providing / Laying Pantry tiles (HMD38-50SF 9" x 17" SB for floor & walls upto 5 feet height (Master brand) or equivalent as per approved shade & layout pattern with 2" thick base concrete including grouting of joint with matching grout material of Stile, complete in all respect as per satisfaction of Architect / bank engineer.	SFT	150	610	91,500	400	60,000	438	65,700	480	72,000	360	54,000
7	<b>Marble</b> Providing & fixing pre polished 3/4" thick Marble Top quality with approved size and shade over 2" thick pre cast RCC slab including 1/2" thick gola, grouting and jointing including cost of cutting of marble for basin and sink bowl including filling with silicone around joint of marble complete in all respect as per satisfaction by the engineer. Pantry Counter Top (Botlicina)	Sft	60	450	27,000	450	27,000	438	26,280	480	28,800	360	21,600
8	<b>WOODEN CABINETS</b> Kitchen Cabinets Lower Unit: Providing, fabricating and fixing in position pantry cabinets 24" deep 3/2" high consisting of 3/4" thick laminated board (Furniture color) of SONEX. Door or equivalent on front shutter and drawers. Dark grey on internal box and shelves moulding 1/2"x3/4" including nails, screws, bolts, imported hinges, catchers, locks, handles, 3 coat of spirit polish of matching shade of furniture color on wood lipping and wood preservative treatment including premium quality ceramic tiles above 4" thick P.C.C floor platform complete in all respects as per drawings and as directed by the bank's Engineer. all kind of best quality hardware's, spring hinges, SS handles, locks etc. Complete in all respects.	Sft	15	1500	24,000	1500	22,500	1379	20,685	1860	27,900	1255	8,925

  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

SN#	DESCRIPTION	UNIT	QTY.	RATE	AMOUNT	RATE	AMOUNT	RATE	AMOUNT	RATE	AMOUNT	RATE	AMOUNT	RATE	AMOUNT
	<b>Upper Unit:</b> Providing, fabricating and fixing in position pantry cabinets 12" deep and 24" high (hanging) consisting of 3/4" thick laminated board (Furniture color) of SONEX, AL Neor or equivalent on front shutter and drawers, Dark grey on internal box and shelves moulding 1/2"x3/4" including nails, screws, bolts, imported hinges, catchers, locks, handles, 03 coat of sprit polish of matching shade of furniture color on wood lipping and wood preservative treatment complete in all respects as per drawings and as directed by the bank's Engineer.	sft	15	1500	22,500	1300	19,500	1379	20,685	1860	27,900	1255	18,825		
9	<b>MDF Low Height Partition BM Seating</b> Provide and install 2" x 2" partial wood Solignum treated frame for wooden partitions spaced no more than 16" on center vertically and 24" on center in the horizontal dimension fixed in plumb and level. With water based matt finish paint. Complete in all respect with good work man ship and as per details mentioned in drawing.	Sft	32	1100	35,200	700	22,400	938	30,016	950	30,400	850	27,200		
10	<b>Wooden Hanging Beams.</b> Providing & fixing in position wooden Beams for support to fix glass and glass door consisting of 1 1/2 x3" @ 2'-0" c/c partial wood framing and 1/2" MDF Lasant board (Malaysia) on both sides including nails, bolts, glue wastage, wood preservative, treatment & 3 coats of paint complete in all respect as per drawings and as directed by Bank's Engineers.	RFT	35	1150	40,250	650	22,750	1268	44,380	1120	39,200	1150	40,250		
11	<b>Paint at Walls</b> Providing and applying, 2 coats of ICI Matt Finish Paint, Ash White (3130) or BERGER or equivalent of approved colour and shade, at any floor & at any height over one coat of primer and making smooth and even surface by applying ICI Paritex base filling as per specifications, to surface of walls, complete in all respects as specified and as approved by the bank's Engineer.	SFT	3200	50	160,000	75	240,000	65	208,000	70	224,000	63	201,600		
12	MS Grill at main entrance & Acs oufer	SFT	150	850	127,500	1000	150,000	805	120,750	1100	165,000	720	108,000		
13	MS door for ATM & Guard post	sft	42	1800	75,600	1300	54,600	1350	56,700	1250	52,500	1250	52,500		
14	Cutting of mezzaming floor R.C.C slab to make way for Stair, 4'x6' job includes cutting, finishing of slab edges, removal of debris away	Job	1	70000	70,000	12000	12,000	49613	49,613	40000	40,000	51000	51,000		
15	Installation of MS straight stair from GF to MF with support on MS girder/U	Job	1	350000	350,000	125000	125,000	165375	165,375	60000	60,000	165000	165,000		
16	Providing & installation of 3/4" th marble steps polished complete in all respect	Sft	110	390	42,900	800	88,000	717	78,870	950	104,500	710	78,100		
17	Providing & SS railing at stair 2" pipe & support	Rft	15	2400	36,000	2500	37,500	3528	52,920	1800	27,000	3600	54,000		
	<b>TOTAL CIVIL WORKS.....</b>				1,941,950		1,856,600		2,022,928		1,894,300		2,228,720		

**Renovation Works- Wah Cant Branch Rawalpindi**

**Plumbing Works**

S.No.	DESCRIPTION	UNIT	QTY	Dry Good		Paint		Labour		Material		Total	
				RATE	AMOUNT	RATE	AMOUNT	RATE	AMOUNT	RATE	AMOUNT	RATE	AMOUNT
1(a)	Providing and fixing European type ceramics ware coupled water closet, (PORTA) or equivalent, white / light colour, including 3 gallons cistern, P/S trap, C.P tee stop cock with wall cups, connection pipes, "SONEX", "MASTER ( Royal)", hinged double bacolite seat and cover of best quality, all joints to services and drains, plugging and screwing as necessary to the structure and make good the same, complete in all respect as per specifications and drawings.	Nos	1	25,000	25,000	65,000	65,000	23,500	23,500	46,300	46,300	35,000	35,000
2	Providing and fixing Wash hand Basin Vanity type, PORTA or equivalent white colour "SONEX"/ "MASTER" waste coupling, plug with C.P brass chain, 1.5" dia. P.V.C ( D type) waste pipe connections to water lines, tee stop cock for cold and hot water inlet connector with nuts and fitting, waste pipe waste coupling, plugs with chain other ancillary material C.P grating including C.P bottle trap, testing etc. complete in all respect and as directed by the Engineer.	Nos.	1	18,000	18,000	50,000	50,000	14,000	14,000	26,500	26,500	20,000	20,000
3	Provide & fix best quality Stainless Steel imported Kitchen Sink, Balraco or equivalent make (40" x 20") 1000mm x 500mm sink with CI or WI brackets 150mm (6") built in wall, 40mm(1 1/2") rubber plug & chrome plated brass chain, 40mm (1 1/2") C.P brass waste, pillar tap 2 way deluxe, 40 mm (1 1/2") dial malleable iron or C.P. brass trap, Bottle trap and unions. Make requisite holes in walls & floor for pipe connections & make good with approved material. (with SONEX fittings).	Nos.	1	5,000	5,000	30,000	30,000	8,500	8,500	18,500	18,500	10,500	10,500

SIGNATURE MEMBERS PO-ADMIN  
 Head - Admin Div.  
 Member - JBL.  
 Date: \_\_\_\_\_



S.No.	DESCRIPTION	UNIT	QTY											
9	Providing, fixing, joining and testing Polypropylene Random (PPR) pipes make Dadex / AGM or approved equivalent pressure pipe for cold/hot water as per DIN 8077-8078, PN-20 for pipes and DIN 16962, PN-25 for fittings (polyfusion welded joints) inside building including fittings and specials (sockets, tees, elbows, bends, crosses, reducers, adaptor, plugs and union etc.) supported on walls or suspended from roof slab or run in chases including pipe hangers, supports, cutting and making good the chases and holes, its painting and insulation against sun light complete in all respects. conforming to BSS. Cut and make good with Test and Commission for cold and hot water system. Job also includes making Water Connection to existing Water supply system.													
i	Dia 1-1/2"	rft								263	41,600	10,800	34,190	
ii	Dia 1-1/4"	rft	130	375	230	29,900	320	41,600					34,190	
iii	Dia 1"	rft		350	190	24,700	160	20,800					34,190	
iv	Dia 3/4"	rft	130											
11	Provide and fix cast UPVC pipes( AGM/dadex /vebro turkey Brand) including fittings such as tees, elbows, sockets, wyc, hangers/supports etc. conforming to BSS for soil waste and vent pipes as embedded in floor and walls or suspended from slab or clamped to wall including plaugsm hangars, beds, Tees, Yees. Include for making requisite number of holes in walls and floors where required and making good the same as necessary to the structure labeling, testing to 6.5 feet water height complete. Job also includes making Sewer Connection to existing Sewerage disposal system.													
i	Dia 2"	rft			420	12,600	650	19,500		430			12,900	
ii	Dia 3"	rft	30	400	490	24,500	780	39,000		510			25,500	
iii	Dia 4"	rft	50	450										
14	Providing, installing & testing of Over Head Fiber Glass Water Tank make Dura or approved equivalent, with 300 Gallons storage capacity, including electric pump, motor and all necessary fittings etc. Complete in all respects as per instruction of Architect	No	1	18,000	34,800	34,800	42,000	42,000		35,000			35,000	
<b>TOTAL</b>										<b>155,050</b>	<b>417,850</b>	<b>199,350</b>	<b>316,300</b>	<b>234,780</b>

**Electrical Works- Wah Cant Branch Rawalpindi**

S.No.	DESCRIPTION	UNIT QTY	Rate	Amount	Rate	Amount	Rate	Amount	Rate	Amount	Rate	Amount
<b>A. INTERNAL WIRING</b>												
1	Supply, installation and commissioning of Light Circuit wiring, from MCB in DB to Switch Board to be	Nos. 5	5200	26,000	8500	42,500	5844	29,220	8400	42,000	5600	28,000
2	Providing, Installation, testing and commissioning of wiring of <b>Three light points</b> controlled by one switch and wired with 3x1.5 mm sq PVC	Nos. 22	1400	30,800	3500	77,000	5292	116,424	6500	143,000	4600	101,200
3	Providing & wiring of <b>1-3 pin 15 Amps</b> power socket outlets (for General Use) wired with 2x4mm <sup>2</sup> +1x2.5mm <sup>2</sup> CU/PVC	Nos. 3	5900	17,700	7000	21,000	8490	25,470	12900	38,700	7500	22,500
4	Providing & wiring of <b>1-3 pin 10 Amps</b> power switch socket outlets (for RAW supply / WAPDA) wired with 3x2.5mm <sup>2</sup> 1 core CU/PVC insulated cable	Nos. 4	5500	22,000	7000	28,000	7497	29,988	8500	34,000	6600	26,400
5	Confirming to same specification as mentioned above in item A-08, but outlet to outlet wiring. Complete in all respect.	Nos. 4	5100	20,400	2500	10,000	6064	24,256	4200	16,800	5100	20,400
6	Providing & wiring of <b>2-3 pin 13 Amps</b> power switch socket outlets (for UPS) wired with 3x2.5mm <sup>2</sup> 1 core CU/PVC insulated cable	Nos. 4	5800	23,200	8500	34,000	7497	29,988	8500	34,000	6500	26,000
7	Confirming to same specification as mentioned above in item A-09, but outlet to outlet wiring. Complete in all respect.	Nos. 4	6100	24,400	4000	16,000	6064	24,256	4200	16,800	5000	20,000

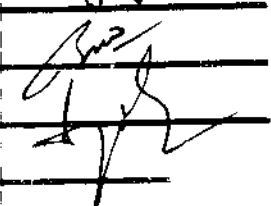
SIGNATURE MEMBERS PC-ADMIN

\_\_\_\_\_

\_\_\_\_\_

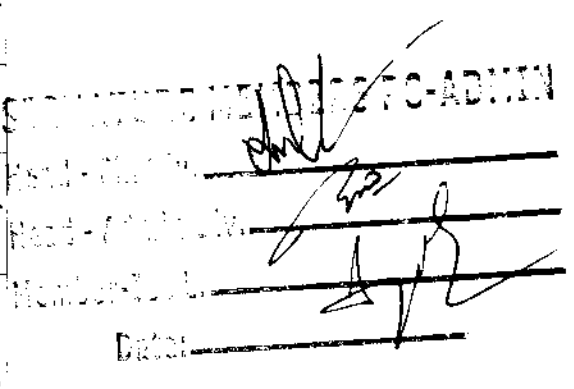
\_\_\_\_\_

S.No.	DESCRIPTION	UNIT	QTY	Rate	Amount	Rate	Amount	Rate	Amount	Rate	Amount	Rate	Amount
8	Providing installing & wiring for Split A/C's unit from distribution board to respective 1-3 pin 16 Amps switch socket, wired with 2x6mm <sup>2</sup> + 1x4mm <sup>2</sup> 1 core CU/PVC cable	Nos.	5	4000	20,000	14000	70,000	12128	60,640	14400	72,000	12000	60,000
9	Sign Board Wiring as same as above	Nos.	1	6000	6,000	16000	16,000	12128	12,128	15000	15,000	11500	11,500
10	Flat Panel LED OS-DI-3-12W (round) of Osaka or equivalent 6" dia	Nos.	50	1400	70,000	1550	77,500	2014	102,050	2200	110,000	1800	90,000
11	Supply, installation and commissioning of Exhaust / Bracket Fans (of following sizes, plastic body, louvers, all necessary fixing accessories,												
(i)	Bracket fan wall	Nos.	1	8500	8,500	14000	14,000	6615	6,615	9500	9,500	6500	6,500
(ii)	Exhaust Fan 12" dia	Nos.	2	6500	13,000	7500	15,000	6064	12,128	7500	15,000	5100	10,200
<b>12. TELEPHONE SYSTEM</b>													
	Providing & wiring of each Telephone socket outlet in preinstalled outlet boxes, wired with 4 Pair Cat-6 (UTP) Cable, make 3M / PANDUIT USA in 25mm dia PVC conduit recessed in slabs, floors, walls, columns or on slab above false ceiling or as required as per site conditions, complete with all conduit & wiring accessories including RJ-45 IOs & Face Plates. Complete in all respect with suitable size 1.5mm thick sheet steel back box recessed in wall.												
		Nos.	8	4500	36,000	5000	40,000	9150	73,200	4500	36,000	8000	64,000
<b>13. COMPUTER NETWORKING SYSTEM</b>													
	Providing, laying & testing of Data Cable 4 Pair Cat -6, make 3M / PANDUIT USA in 25 mm dia PVC conduit including Data Outlet (3M make) Face plate (2port) w/o shutter RJ-45 (Panduit USA) K6 Jack fixed, on 1.5 mm thick steel back box complete in all respect and as per drawing, and providing of Flake Test Report & 3M's 20 Years Certificate (Complete as per Client's requirement )												
		Nos.	9	5500	49,500	7500	67,500	9150	82,350	5400	48,600	8000	72,000
14	Earthing Work	Job	1	45000	45,000	85000	85,000	66150	66,150	92000	92,000	52000	52,000
15	Providing & installation of Patch Panel 3M 24 ports (if required)	Nos.	1	25000	25,000	40000	40,000	31500	31,500	45000	45,000	30000	30,000
	<b>Total - Electrical works</b>				<b>437,500</b>		<b>653,500</b>		<b>726,363</b>		<b>768,400</b>		<b>640,700</b>

  
 PROJECT MANAGER

**E. UTILIZATION OF EXISTING ITEMS (Removal & installation of items)**

S#	Items	Unit	QTY	RATE	AMOUNT	RATE	AMOUNT	RATE	AMOUNT	RATE	AMOUNT	RATE	AMOUNT	RATE	AMOUNT
1	Glass Doors (Main Entrance 02, ATM Cabin 01, BM 01 Cash Counter 01) job includes new floor machines & glass partition	No	5	12000	60,000	25000	125,000	19845	99,225	14400	72,000	30000	150000		
2	Removal of glass & installation of BM cabin & front	Sft	150	210	31,500	450	67,500	497	74,550	340	51,000	650	97,500		
3	All wooden Furniture (Chairs Cleaning+tables+02 Cash Counters, wooden cabinets )	Job	1	45000	45,000	100000	100,000	33075	33,075	85000	85,000	45000	45000		
4	All Steel items (Vault/Locker Room Doors 02, Safe+SS Card Trolley+Fire Almrhah+02 locker cabinets 02, metal trunks 02)		1	155000	155,000	120000	120,000	165375	165,375	165000	165,000	125000	125000		
5	Main DB	Job	1	7000	7,000	16000	16,000	8269	8,269	35000	35,000	20000	20000		
6	UPS DB	Job	1	5500	5,500	12000	12,000	16538	16,538	15000	15,000	25000	25000		
7	IT Rack & Patch Panel( with 9 new IOS 3M)	Job	1	5000	5,000	25000	25,000	16538	16,538	32000	32,000	25000	25000		
8	Main Cable 25mm2	Job	1	8000	8,000	15000	15,000	19845	19,845	16000	16,000	25000	25000		
9	Telephone main cable	Job	1	5000	5,000	8000	8,000	3308	3,308	9000	9,000	12000	12000		
	<b>TOTAL</b>				<b>322,000</b>		<b>488,500</b>		<b>436,723</b>		<b>480,000</b>		<b>524,500</b>		


  
 Date: \_\_\_\_\_





# DigiCom Technologies (Pvt.) Ltd.

## QOUTATION FOR SINDH BANK WAH CANTT BRANCH RENOVATION WORK

### BOQ

RENOVATION WORKS- Wah Cant Branch Rawalpindi			
SUMMARY			
S/NO.	DESCRIPTION	AFTER CHECKING	AMOUNT
			Rs
1	CIVIL WORK		1,941,950
2	ELECTRIC WORK		437,500
3	PLUMBING WORK		155,050
4	AC & HAVC WORK		239,350
5	UTILIZATION OF EXISTING ITEMS		322,000

GRAND TOTAL

3,095,850

M/S DIGICOM TECHNOLOGIES PVT LIMITED



SIGNATURE MEMBERS PC-ADMIN

Head - Fin Div. \_\_\_\_\_

Head - Admin Div. \_\_\_\_\_

Member-IOBL. \_\_\_\_\_

Date: \_\_\_\_\_




A-302 3rd floor, Anum Classic Shahrah-e-Faisal, Karachi. Tel : 34327531-32, Fax : 34327533  
web : www.digicom-technologies.com

Lahore-Islamabad-Peshawar-Quetta-Multan-Hyderabad-Sukkur-Sahiwal-Bahawalpur

**RENOVATION WORKS- Wah Cant Branch Rawalpindi**

CIVIL WORK					
S/NO.	DESCRIPTION /SPECIFICATION	QTY	UNIT	RATE	AMOUNT
1	<p><b>Termite Proofing</b> Providing and carrying out termite proofing using FIPROKILL/ BIFLEX / DURSANE with a solution of 1 gallon of chemical to 50 gallons of water, sparing this solution @ 2 liters per sq. meter area (or liters per 10.76 sft. Area) with a pressure ensuring at least 3" penetration in the soil of the area to be treated. The contractor will provide a guarantee for a period of ten years against infestation of termite in the shape and mode approved by the Engineer, stating that in case of infestation, additional treatment will be provided by the contractor at no extra cost to the Client (horizontal &amp; Vertical).</p>	1,500	SFT	30	45,000
<b>REINFORCED CEMENT CONCRETE (Vault Room &amp; Locker Rooms per Layout)</b>					
2	<p>Providing and laying, compacting finishing &amp; curing etc. straight or curved cast- in place designed mix 1:2:4 Reinforced Cement Concrete using 1 Part of Ordinary Portland Cement or equivalent, 2 Parts of silt free local sand and 4 Parts of 3/4" thick downgraded crushed stone; mixed in a manner to achieve a cube strength of 3000 psi in 28 days, including mixing, transporting, hoisting, lifting &amp; placing at any height / depth, vibrating and curing etc. Complete in all respect including cost of Steel Reinforcement (3/8" dia steel bars G-60 @ 6" C/C both ways, staggered double jaal in a manner that the alternate spacing b/w bars should not increase 3" C/C) &amp; form work for Cement Concrete including cutting, bending, laying in position, making joint and fastening, removal of rust from bars, cost of binding wire and labor charges for binding of steel reinforcement; also includes cost of form work and its removal. Complete in all respects, 6" thick walls, and column or as per direction of Engineer</p>				
	<b>i) R.C.C Walls for Vault</b>	330	CFT	1,150	379,500

SIGNATURE MEMBERS TC-ADMIN



**RENOVATION WORKS- Wah Cant Branch Rawalpindi**

CIVIL WORK					
S/NO.	DESCRIPTION /SPECIFICATION	QTY	UNIT	RATE	AMOUNT
3	<b>Block / Brick Masonary works.</b>				
	Providing & laying Block / Brick masonry walls including racking of joints with 1:4 cement sand mortar, the job includes Two 3/8" dia steel bars of 2'-0" length on both sides of wall at every 3'-0" ft height for anchoring of masonry with the sides and Two 3/8" dia bars of 2'-0" length at every third block length for anchoring masonry walls to plinth/floor beams, complete in all respect as per drawing, specifications, to the satisfaction of Architect / bank's engineer	520	SFT	170	88,400
4	<b>Plaster Works.</b>				
	Providing & laying 3/4" thick cement sand plaster (Internal / External) with 1:4 cement sand mortar on walls, columns, beams, using best quality O.P.C, including 6" inches wide mesh at joints of structure with block masonry and over conduiting ,smooth trowel finish complete in all respect. (This includes all the base plaster require for making diagonal and alignment for the exisiting walls) as per satisfaction of Architect / bank's engineer	2,150	SFT	55	118,250
5	<b>FALSE CELING Gypsum Board (24"X24") Only at GF</b>				
	Providing & laying 8 mm thick gypsum board False Ceiling, 24" x 24" Elephant Brand or approved equivalent in straight, curved, tiles or multiple profiles, as shown on drawing section, fixed with imported powder coated , with groove, aluminum, "T" & "L" section with ceiling suspension system having provisions for light and AC grill. Complete in all respect as per drawing and instruction of Bank's Engineer	1,450	SFT	135	195,750
6	<b>Ceramic Tiles</b>				
	Toilet: Providing / Laying wash room tiles (HMD45-117 9"x17" SB for floor & walls upto 7 feet height (Master brand) or equivalent as per approved shade & layout pattern with 2" thick base concrete including grouting of joint with matching grout material of Stile, complete in all respect as per satisfaction of Architect / bank engineer.	150	SFT	610	91,500



## RENOVATION WORKS- Wah Cant Branch Rawalpindi

CIVIL WORK					
S/NO.	DESCRIPTION /SPECIFICATION	QTY	UNIT	RATE	AMOUNT
	<b>Kitchen/Pantry:</b>				
7	Providing / Laying Pantry tiles (HMD38-50SF 9" x 17" SB for floor & walls upto 5 feet height (Master brand) or equivalent as per approved shade & layout pattern with 2" thick base concrete including grouting of joint with matching grout material of Stile, complete in all respect as per satisfaction of Architect / bank engineer	60	SFT	450	27,000
	<b>Marble</b>				
8	Providing & fixing pre polished 3/4" thick Marble Top quality with approved size and shade over 2" thick pre cast RCC slab including 1/2" thick gola, grouting and jointing including cost of cutting of marble for basin and sink bowl including filling with silicone around joint of marble complete in all respect as per satisfaction by the engineer. Pantry Counter Top (Boticina)	12	SFT	1,050	12,600
	<b>WOODEN CABINETS Kitchen Cabinets</b>				
9	Lower Unit: Providing, fabricating and fixing in position pantry cabinets 24" deep 32" high consisting of 3/4" thick laminated board (Furniture color) of SONEX, Noor or equivalent on front shutter and drawers, Dark grey on internal box and shelves moulding 1/2" x 3/4" including nails, screws, bolts, imported hinges, catchers, locks, handles, 3 coat of sprit polish of matching shade of furniture color on wood lipping and wood preservative treatment including premium quality ceramic tiles above 4" thick P.C.C floor platform complete in all respects as per drawings and as directed by the bank's Engineer. all kind of best quality hardware's, spring hinges, SS handles, locks etc. Complete in all respects.	15	SFT	1,600	24,000





★ **RENOVATION WORKS- Wah Cant Branch Rawalpindi**

CIVIL WORK					
S/NO.	DESCRIPTION /SPECIFICATION	QTY	UNIT	RATE	AMOUNT
10	Upper Unit:Providing, fabricating and fixing in position pantry cabinets 12" deep and 24" high (Hanging) consisting of 3/4" thick laminated board (Furniture color) of SONEX, AL Noor or equivalent on front shutter and drawers, Dark grey on internal box and shelves moulding 1/2" x3/4" including nails, screws, bolts, imported hinges, catchers, locks, handles, 03 coat of sprit polish of matching shade of furniture color on wood lipping and wood preservative treatment complete in all respects	15	SFT	1,500	22,500

SIGNATURE: [Signature] **PC-ADMIN**  
Head - P.S. Div. \_\_\_\_\_  
Head - Admin Div. \_\_\_\_\_  
Member-ICL \_\_\_\_\_  
Date: \_\_\_\_\_



RENOVATION WORKS- Wah Cant Branch Rawalpindi

CIVIL WORK					
S/NO.	DESCRIPTION /SPECIFICATION	QTY	UNIT	RATE	AMOUNT
	<b>MDF Low Height Partition BM Seating</b>				
11	Provide and install 2" x 2" partal wood Solignum treated frame for wooden partitions spaced no more than 16" on centre vertically and 24" on centre in the horizontal dimension fixed in plumb and level. With water based matt finish paint. Complete in all respect with good work man ship and as per details mentioned in drawing.	32	SFT	1,100	35,200
	<b>Wooden Hanging Beams.</b>				
12	Providing & fixing in postion wooden Beams for support to fix glass and glass door consistng of 1 1/2 x3" @ 2'-0" c/c partal wood framing and 1/2" MDF Lasani board (Malaysia) on both sides including nails, bolts, glue wastage, wood preservative, treatment & 3 coats of paint complete in all respect as per drawings and as directed by Bank' s Engineers.	35	RFT	1,150	40,250
	<b>Paint at Walls</b>				
13	Providing and applying, 2 coats of ICI Matt Finish Paint Ash White (3130) or BERGER or equivalent of approved colour and shade, at any floor & at any height over one coat of primer and making smooth and even surface by appling ICI Paintex base filling as per specifications, to surface of walls, complete in all respects as specified and as approved by the bank's Engineer	3,200	SFT	50	160,000
14	<b>MS Grill at main entrance &amp; Acs outer</b> MS Grill at main entrance & Acs outer	150	SFT	850	127,500
15	<b>MS door for ATM &amp; Guard post</b> MS door for ATM & Guard post	42	SFT	1,800	75,600
16	Cutting of mezzaning floor R.C.C slab to make way for Stair 4'x6', job includes cutting, finishing of slab edges. remval of debris away	1	JOB	70,000	70,000
	Installation of MS straight stair from GF to MF with support on MS girder/U,	1	JOB	350,000	350,000
17	Providing & installation of 3/4" th marble steps polished complete in all respect	110	SFT	390	42,900
	Providing & SS railing at stair 2" pipe & support	15	RFT	2,400	36,000
<b>CIVIL WORK TOTAL:</b>					<b>1,941,950</b>



RENOVATION WORKS- Wah Cant Branch Rawalpindi

SIGNATURE MEMBERS PC-ADMIN

Head - Finance *[Signature]*

Head - Admin *[Signature]*

Member-ITL *[Signature]*

Date: *[Signature]*

ELECTRIC WORK

S/NO.	DESCRIPTION /SPECIFICATION	QTY	UNIT	RATE	AMOUNT
<b>A. INTERNAL WIRING</b>					
1	Supply, installation and commissioning of Light Circuit wiring, from MCB in DB to Switch Board to be	5	Nos	5,200	26,000
2	Providing, Installation, testing and commissioning of wiring of Three light points controlled by one switch and wired with 3x1.5 mm sq. PVC	22	Nos	1,400	30,800
3	Providing & wiring of 1-3 pin 15 Amps power socket outlets (for General Use) wired with 2x4mm <sup>2</sup> +1x2.5mm <sup>2</sup> CU/PVC	3	Nos	5,900	17,700
4	Providing & wiring of 1-3 pin 10 Amps power switch socket outlets (for RAW supply / WAPDA) wired with 3x2.5mm <sup>2</sup> 1 core CU/PVC insulated cable	4	Nos	5,500	22,000
5	Confirming to same specification as mentioned above in item A-08, but outlet to outlet wiring. Complete in all respect.	4	Nos	5,100	20,400
6	Providing & wiring of 2-3 pin 13 Amps power switch socket outlets (for UPS) wired with 3x2.5mm <sup>2</sup> 1 core CU/PVC insulated cable	4	Nos	5,800	23,200
7	Confirming to same specification as mentioned above in item A-09, but outlet to outlet wiring. Complete in all respect.	4	Nos	6,100	24,400
8	Providing installing & wiring for Split A/C's unit from distribution board to respective 1-3 pin 16 Amps switch socket, wired with 2x6mm <sup>2</sup> + 1x4mm <sup>2</sup> 1 core CU/PVC cable	5	Nos	4,000	20,000
9	Sign Board Wiring as same as above	1	Nos	6,000	6,000
10	Flat Panel LED OS-DL3-12W (round) of Osaka or equivalent 6" dia	50	Nos	1,400	70,000
Supply, installation and commissioning of Exhaust / Bracket Fans of					0
11	Bracket fan wall	1	Nos	8,500	8,500
12	Exhaust Fan 12" dia	2	Nos	6,500	13,000
13	<b>TELEPHONE SYSTEM</b>				0
	Providing & wiring of each Telephone socket outlet in preinstalled outlet boxes, wired with 4 Pair Cat-6 (UTP)Cable, make 3M / PANDUIT USA in 25mm dia PVC conduit recessed in slabs, floors, walls, columns or on slab above false ceiling or as required as per site conditions,, complete with all conduit & wiring accessories including RJ-45 ICs & Face Plates. Complete in all respect with suitable size 1.5mm thick sheet steel back box recessed in wall.	8	Nos	4,500	36,000
14	<b>COMPUTER NET WORKING SYSTEM</b>				0
	Providing, laying & testing of Data Cable 4 Pair Cat -6, make 3M / PANDUIT USA in 25 mm dia PVC conduit including Data Outlet (3M make) Face plate (2port) w/o shutter RJ-45 (Panduit USA)K6 Jack fixed, on 1.5 mm thick steel back box complete in all respect and as per darwing. and providing of Fluke Test Report & 3M's 20 Years Certificate (Complete as per Client's requirement )	9	Nos	5,500	49,500
15	Earthing Work	1	Nos	45,000	45,000
16	Providing & installation of Patch Panel 3M 24 ports (If required)	1	Nos	25,000	25,000
<b>TOTAL</b>					<b>437,500</b>



RENOVATION WORKS- Wah Cant Branch Rawalpindi

PLUMBING WORK					
S/NO	DESCRIPTION /SPECIFICATION	QTY	UNIT	RATE	AMOUNT
1	Providing and fixing European type ceramics ware coupled water closet, (PORTA) or equivalent , white / light colour, including 3 gallons cistern, P/S trap, C.P tee stop cock with wall cups, connection pipes, "SONEX", "MASTER ( Royal)", hinged double bacolite seat and cover of best quality, all joints to services and drains, plugging and screwing as necessary to the structure and make good the same, complete in all respect as per specifications and drawings.	1	NoS	25,000	25,000
2	Providing and fixing Wash hand Basin Vanity type, PORTA or equivalent white colour "SONEX"/ "MASTER" waste coupling, plug with C.P brass chain, 1.5" dia. P.V.C ( D type) waste pipe connections to water lines, tee stop cock for cold and hot water inlet connector with nuts and fitting, waste pipe waste coupling , plugs with chain other ancillary material C.P grating including C.P bottle trap, testing etc. complete in all respect and as directed by the Engineer.	1	NoS	18,000	18,000
3	Provide & fix best quality Stainless Steel imported Kitchen Sink, Balraco or equivalent make (40" x 20") 1000mm x 500mm sink with CI or WI brackets 150mm (6") built in wall, 40mm(1 1/2") rubber plug & chrome plated brass chain, 40mm (1 1/2") C.P brass waste, pillar tap 2 way deluxe, 40 mm (1 1/2") dial malleable iron or C.P. brass trap, Bottle trap and unions. Make requisite holes in walls & floor for pipe connections & make good with approved material. (with SONEX fittings).	1	NoS	5,000	5,000





RENOVATION WORKS- Wah Cant Branch Rawalpindi

PLUMBING WORK					
S/NO	DESCRIPTION /SPECIFICATION	QTY	UNIT	RATE	AMOUNT
4	Provide & fix uPVC floor drains of 4" dia of make Nikkassi or approved equivalent, having minimum guaranteed 2" water seal with screw down C.P cover, peripheral drains with or without a vent arm. Make requisite holes in walls, floor for pipe connections & make good with approved material, including SS drain / grating with side perforation.	2	NoS	6,500	13,000
5	Provide & fix approved quality chromium plated towel rails 750mm x 20mm (30"x3/4") with brackets and C.P screws. (Taiwan make)	1	NoS	2,500	2,500
6	Provide and fix approved quality C.P toilet paper holders and coat hook. (Taiwan make)	1	NoS	1,800	1,800
7	Provide & fix p soap dish of approved quality with C.P screws. (Master /Sonex)(White color)	1	NoS	1,450	1,450
8	Provide and fix Muslim Showers manufactured by Master/Sonex or equivalent, complete with stop cock and controlled spray head.(White color)	1	NoS	3,500	3,500
9	Providing and fixing 15 mm dia C.P. mixer with C.P pipe 15 mm dia, of Master, Sonix or approved equal complete including pipe connections, all fittings, testing etc.(White color)				
10	For Wash basin	1	NoS	8,500	8,500
11	Kitchen Sink Mixer	1	NoS	5,500	5,500



RENOVATION WORKS- Wah Cant Branch Rawalpindi

PLUMBING WORK					
S/NO	DESCRIPTION /SPECIFICATION	QTY	UNIT	RATE	AMOUNT
12	Providing, fixing, jointing and testing Polypropylene Random (PPR) pipes make Dadex / AGM or approved equivalent pressure pipe for cold/hot water as per DIN 8077-8078, PN-20 for pipes and DIN 16962, PN-25 for fittings (polyfusion welded joints) inside building including fittings and specials (sockets, tees, elbows, bends, crosses, reducers, adaptor, plugs and union etc.) supported on walls or suspended from roof slab or run in chases including pipe hangers, supports, cutting and making good the chases and holes, its painting and insulation against sun light complete in all respects. conforming to BSS. Cut and make good with Test and Commission for cold and hot water system. Job also includes making Water Connection to existing Water supply system.				0
13	Dia 1-1/2"		RFT		0
14	Dia 1-1/4"		RFT		0
15	Dia 1"	130	RFT		0
16	Dia 3/4"	130	RFT		0
17	Provide and fix cast UPVC pipes( AGM/dadex /vebro turkey Brand) including fittings such as tees, elbows, sockets, wyc, hangers/supports etc. conforming to BSS for soil waste and vent pipes as embedded in floor and walls or suspended from slab or clamped to wall including plaugsm hangars, beds, Tees, Yees. Include for making requisite number of holes in walls and floors where required and making good the same as necessary to the structure labeling, testing to 6.5 feet water height complete. Job also includes making Sewer Connection to existing Sewerage disposal system.				0
18	Dia 2"		RFT		0
19	Dia 3"	30	RFT	810	24,300
20	Dia 4"	30	RFT	950	28,500



RENOVATION WORKS- Wah Cant Branch Rawalpindi

PLUMBING WORK					
S/NO	DESCRIPTION /SPECIFICATION	QTY	UNIT	RATE	AMOUNT
21	Providing, installing & testing of Over Head Fiber Glass Water Tank make Dura or approved equivalent, with 300 Gallons storage capacity, including electric pump, motor and all necessary fittings etc. Complete in all respects as per instruction of Architect	1	NoS	18,000	18,000
TOTAL:					155,050

\_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_





2020-2021  
No. of Units: \_\_\_\_\_  
No. of AC's: \_\_\_\_\_  
No. of Fans: \_\_\_\_\_  
Date: \_\_\_\_\_

**RENOVATION WORKS- Wah Cant Branch Rawalpindi**

AIRCONDITIONING / HVAC WORKS						
1	Removal of Acs from old premises & installation of same at new premises (with service & Gas balancing)					
	a) 1.0 Ton SAC	1	NoS	8,500		8,500
	b) 1.5 Ton SAC	4	NoS	10,500		42,000
	c) 2.0 Ton SAC	-	NoS			-
	Estimate additional copper piping with insulation for split units make( Muller) (charged as per final measurement on site). The return and supply copper tubing to be sized as per manufacturer's recommendation and to be drawn in separate Aeroflex insulators with gray tape.	240	RFT	650		156,000
	Provide & fix UPVC, 1-1/4" dia and 1" dia pipe, Beta or popular , for AC drain system, (medium) conforming to BSS 1307 of 1957, along with PVC fittings such as tees, elbows, unions, reducers, sockets, Teflon tape for jointing, hangers, supports, sleeves, including testing and commissioning and insulation with Aero flex insulation.	220	RFT	130		28,600
	Providing and installing M.S angle iron brackets, treated with rust proof paint and enamel coating for external A/C's units fixed to the wall slab with Hilti bolts.	5	SET	850		4,250
<b>TOTAL:</b>						<b>239,350</b>





CHIEF EXECUTIVE OFFICER (ADMIN)  
Punjab State Bank  
Head Office  
Lahore  
[Signature]

**RENOVATION WORKS- Wah Cant Branch Rawalpindi**

UTILIZATION OF EXISTING ITEMS					
S/NO.	DESCRIPTION /SPECIFICATION	QTY	UNIT	RATE	AMOUNT
1	Glass Doors (Main Entrance 02, ATM Cabin 01, BM 01 Cash Counter 01) job includes new floor machines & glass partition	5	NoS	12,000	60,000
2	Removal of glass & installation of BM cabin & front	150	SFT	210	31,500
3	All wooden Furniture (Chairs Cleaning+tables+02 Cash Counters, wooden cabinets )	1	JOB	45,000	45,000
4	All Steel Items (Vault/Locker Room Doors 02, Safe+SS Card Trolley+Fire Almrah+02 locker cabinets 02, metal trunks 02)	1	JOB	155,000	155,000
5	Main DB	1	JOB	7,000	7,000
6	UPS DB	1	JOB	5,500	5,500
7	IT Rack & Patch Panel( with 9 new IOS 3M)	1	JOB	5,000	5,000
8	Main Cable 25mm2	1	JOB	8,000	8,000
9	Telephone main cable	1	JOB	5,000	5,000
TOTAL:					322,000

